

Stainless Steel Waterproof Scale

SWII-EWS



SWII-EWS Stainless Steel Waterproof Scale

Trade approved (NMI No. 6/4C/321)

The CAS SWII-EWS is a durable, damp-proof weighing scale with a robust stainless steel housing, designed for reliable performance in wet environments such as food processing facilities and seafood markets.

With rapid stabilisation in less than 0.6 seconds, it delivers fast and accurate weighing, while its lightweight build makes it easy to carry and operate.



► SWII-EWS (LED)




Suitable for damp environment



Stainless steel upper housing and tray



Fast operation and High accuracy

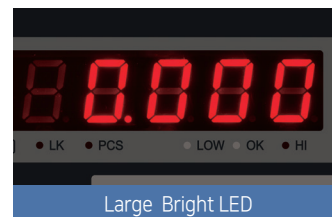

Large Bright LED

CAS

Features

1. Built for Wet Environments

The water-resistant design of the SWII-WS ensures reliable, long-term use in damp conditions such as food processing plants and seafood markets. Its SS304 stainless steel upper housing, sealed PCB, and silicone-sealed connections provide strong protection against moisture and water ingress.



2. Fast and Accurate Weighing

With a stabilisation time of less than 0.6 seconds and a 1/3,000 dual-interval resolution, the SWII-WS delivers rapid, precise weighing to improve workflow efficiency.

3. Large, Bright LED Display

The 6-digit high-intensity LED display provides excellent visibility in any lighting condition, ensuring clear and accurate readings at all times.

► LED display (Character height : 17.3 mm)



4. Easy to Carry

The lightweight and portable design of the SWII-EWS makes it simple to move the scale, whether carried with one hand or both.



5. Durable Stainless Steel Tray

The scale is equipped with a robust stainless steel tray, ensuring hygiene and long-lasting durability in demanding environments.


6. Auto Power-Off & Standby Mode

The automatic power-off and standby functions extend battery life, providing greater efficiency and cost savings during daily use.

Specifications

Model	SWII-EWS(LED)
Capacity (kg)	1.5/3, 3/6, 6/15, 15/30
Readability (g)	0.5/1, 1/2g, 2/5g, 5/10
Resolution	1/3,000(Dual Interval)
Display	6 digit LED(Height : 17.3mm)
Key	4ea (Power, Zero, Tare, Hold)
Function	Hold, Counting, Weighing Comparison(HI/OK/LOW) Auto power off, Standby mode
Power	• 6V 3.3A Rechargeable battery(Pb) • 9VDC/1A Adaptor
Battery Life (Single Display)	• Approx. 80hours
Operation Temperature (°C)	-10 ~ 40
Ingress Protection	Designed according to IP68
Platter Size (mm)	237 (W) x 192 (D) (SUS)
Product Size (mm)	257 (W) x 298 (D) x 117 (H)
Product Weight (kg)	Approx. 2.8

Dimensions

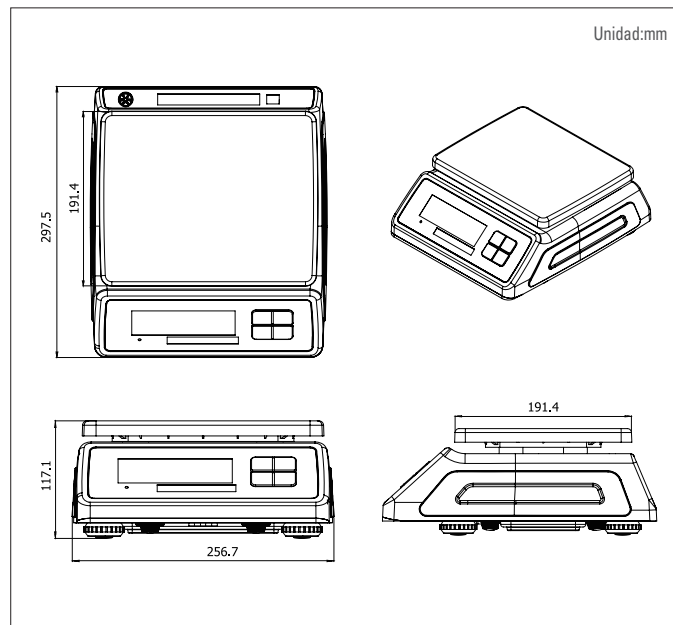

CAS AUSTRALIA

UNIT 8, NORTHLINK, 459 TUFNELL ROAD,
BANYO QLD 4014, AUSTRALIA

TEL: +61 7 3267 7767

EMAIL: sales@casscale.com.au

www.cassscale.com.au



* Specifications are subject to change without notice improvement.

