



455W N97 / N305 2nd Display Installation

Part Numbers:

Terminals

TTFLEL455057	ELEMENT 455W N97 8/128 15.6P STD BLK W11
TTFLEL455066	ELEMENT 455W I3-N305 16/256 15.6/P STD BLK W11

Customer Display

TTFLEL455060	ELEMENT 455/455W/485 CDU 2ND DISPLAY 11.6 TOUCH BK
--------------	--

The customer display unit (CDU) connects to the back of the terminal stand and is connected to the terminal via the FE-DP cable for video and touch.

Installation Instructions


On a clean flat surface put the terminal face down and remove the I/O cover and stand (use a Phillips screwdriver). Undo the knurled knob then slide the stand towards the bottom of the terminal to remove it.



Connect the FEDP cable to the terminal and lay it across the back of the screen




Align the FEDP cable with the notch on the back of the stand then reattach the stand

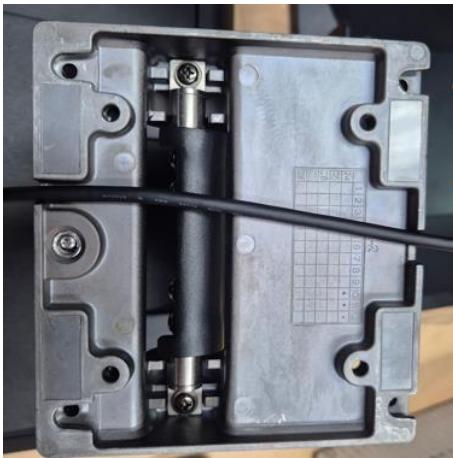

Feed the cable through the hole in the top of the CDU bracket then attach the connector plug to the port on the CDU



Remove the rubber covers from the screw holes in the back of the stand then attach the CDU with the 2 supplied screws.

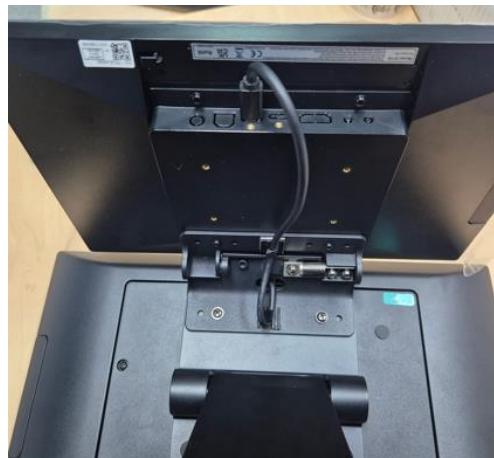

Feed the cable in to the correct length and position then attach to the plastic clips



Power on the terminal and set up extended desktop

The touch screen works on both screens. If you need to disable touch on the CDU you can do this by disabling it in Device Manager.