



XT-6015C

High-End Fanless POS Terminal

# XT-6015C



In today's retail and hospitality markets, POS terminal is no longer just a cold and hard business tool. It is a part of the store decoration, a part of the store image. Each curve and detail of the POS terminal should add something to the overall mood of the store, to lift the shopping experience of customers.

### The XT-6015C

features a 15" true-flat PCAP touch screen, beautifully sculptured slim body, and sexily curved base stand, it looks right at home at any elegantly decorated store. More than just good looks, the XT-6015C offers ample of performance and flexibility to satisfy the most demanding daily POS operations.

#### Sleek Look

Every curve and detail of the XT-6015C is carefully thought out to make itself one of the most visually desirable terminals in the market.

#### Powerful Performance

Equipped with Intel Skylake Core i5 to provide robust performance to fit each unique need.

### Multi-Position Folding Base (U.S. Patent 9004436)

The XT-6015C provides the selection of two foldable bases, the curvy slim GEN7E base and the larger but practical GEN8E base. The foldable base can be configured into "Flat Folded Mode" to save the shipping package volume, "Low Profile Mode" to allow greater interaction between the cashier and the customer, and the traditional "Full Extended Mode". All this can be achieved with a simple pull of the hidden lever.



Full Extended Mode




Low Profile Mode



Flat Folded Mode



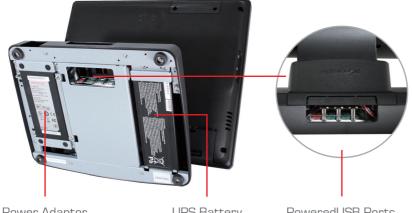

Power Adaptor

**UPS** Battery

PoweredUSB Ports

# Patented Fanless Technology

Solve the fan maintenance issue and provide silent mode operation, which is ideally suited for high-end boutique stores or hospital environments.

## GEN8E Base (U.S. Patent 9004436)

Optional GEN8E base integrates internal power adaptor and PoweredUSB port into the base stand, which keeps counters clutter-free.

# XT-6015C

Specification	XT-6015C
Processor	Intel Skylake Core i5-6360U
System Memory	DDR4 SO-DIMM x 1, max. 16 GB
Storage Device	M.2 connector [SATA Signal Only] x 1 + SATA x 1, w/ power connector (SATA port is available through service window)
RAID Function	N/A
Intel vPro Support	N/A
TPM Support	Optional
Power Supply	12V/60W
OS Support	Windows 7/POSReady 7/Windows Embedded 8.1 Industry 64 bit/Windows 10 IoT 64 bit
Display & Touch	
LCD	15" TFT LCD
Resolution	1024 x 768
Touch	True-flat PCAP touch with multi-touch support (IP65 on front panel)
I/O & Expansion	
Serial Port	RJ50 x 3, 5V/12V support on all COM ports
Parallel Port	N/A
Standard USB Port	5, USB 3.0 x 2 + USB 2.0 x 3
PoweredUSB Port	Optional 24V x 1 + 12V x 3 via GEN8E base
LAN Port	10/100/1000 Mb x 1
Display Port	VGA x 1, 12V support for Posiflex monitors
CR Port	1, control 2 CR via optional Y-cable, supporting 24V cash drawer
PS/2 Port	N/A
UPS Port	N/A
Audio	Internal 2W speaker x 1
Expansion Slot	M.2 slot x 1
Physical Dimension	
Dimension (W x D x H in mm)	372 x 320 x 252.7
Weight (N. W. in kg)	5.86
Environmental	
Operating Condition	0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)
Storage Condition	-20°C - 70°C, 10%RH - 90%RH
Built-in Options	
WiFi	M.2 WiFi/BT module
Attachment Options	THE VIII Y ST MOUNT
Accacimient Options	Non tough TET LCD: 7"/0.7"/10.1"/1/1/"/15"
POS Monitor	Non-touch TFT LCD: 7"/9.7"/12.1"/14"/15"; PCAP touch TFT LCD: 9.7"/14"/15"; Resistive touch TFT LCD: 15"
Line Display	2 x 20 rear-mount VFD/LCD customer line display; 7" color LCD graphical customer line display
Attachment	MSR; iButton; Rotatable 2D Scanner; RFID; Fingerprint Sensor; Keypad

Authorised Australian & New Zealand Distributor: Goodson Imports Pty Ltd 9 Liberty Road, Huntingwood NSW 2148 Representation in all main States and New Zealand Ph: 02-8875 4544 Fax 02-8875 4588 www.goodson.com.au





















Fax: +886-2-2268-5388 www.posiflex.com Authorized Distributor / Reseller

<sup>\*</sup>Designed and Manufactured in Taiwan by Posiflex Technology, Inc.
\*The product information and specifications are subject to change without prior notice.

<sup>\*</sup>Please refer to the website for more attachment options.