


Powered Swivel Stand


PROPER

User Guide

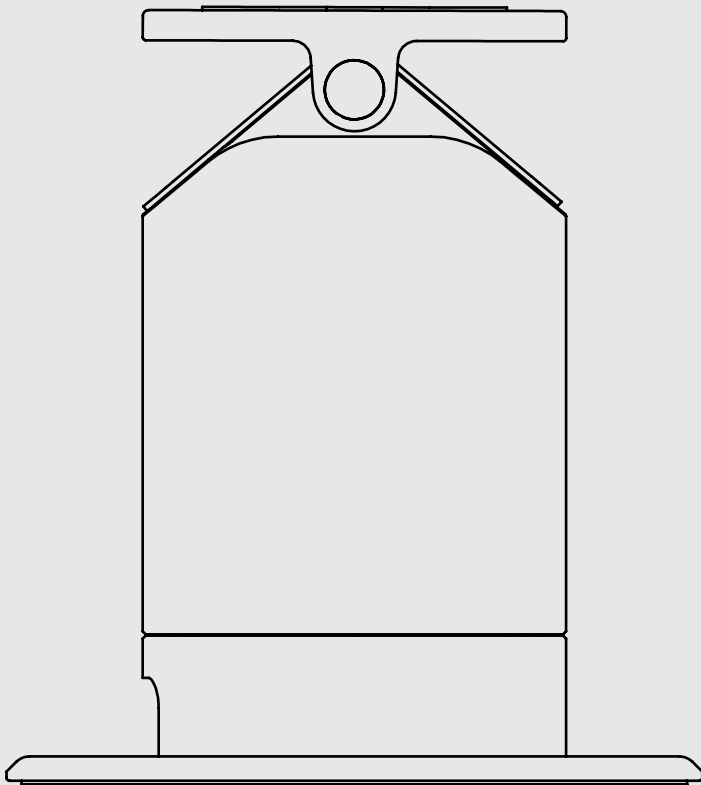

What is Included


1x Powered Swivel Stand

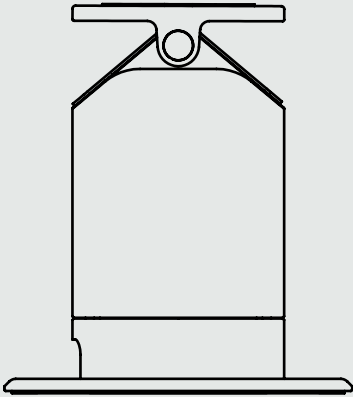

1x iPad Powered Lock Belt



4x M4 Fasteners




1x 180° USB-C Cable



Base Dimensions

For installations requiring a countertop pass-through for the Powered Swivel Stand, please refer to the drawing below.

Units: mm

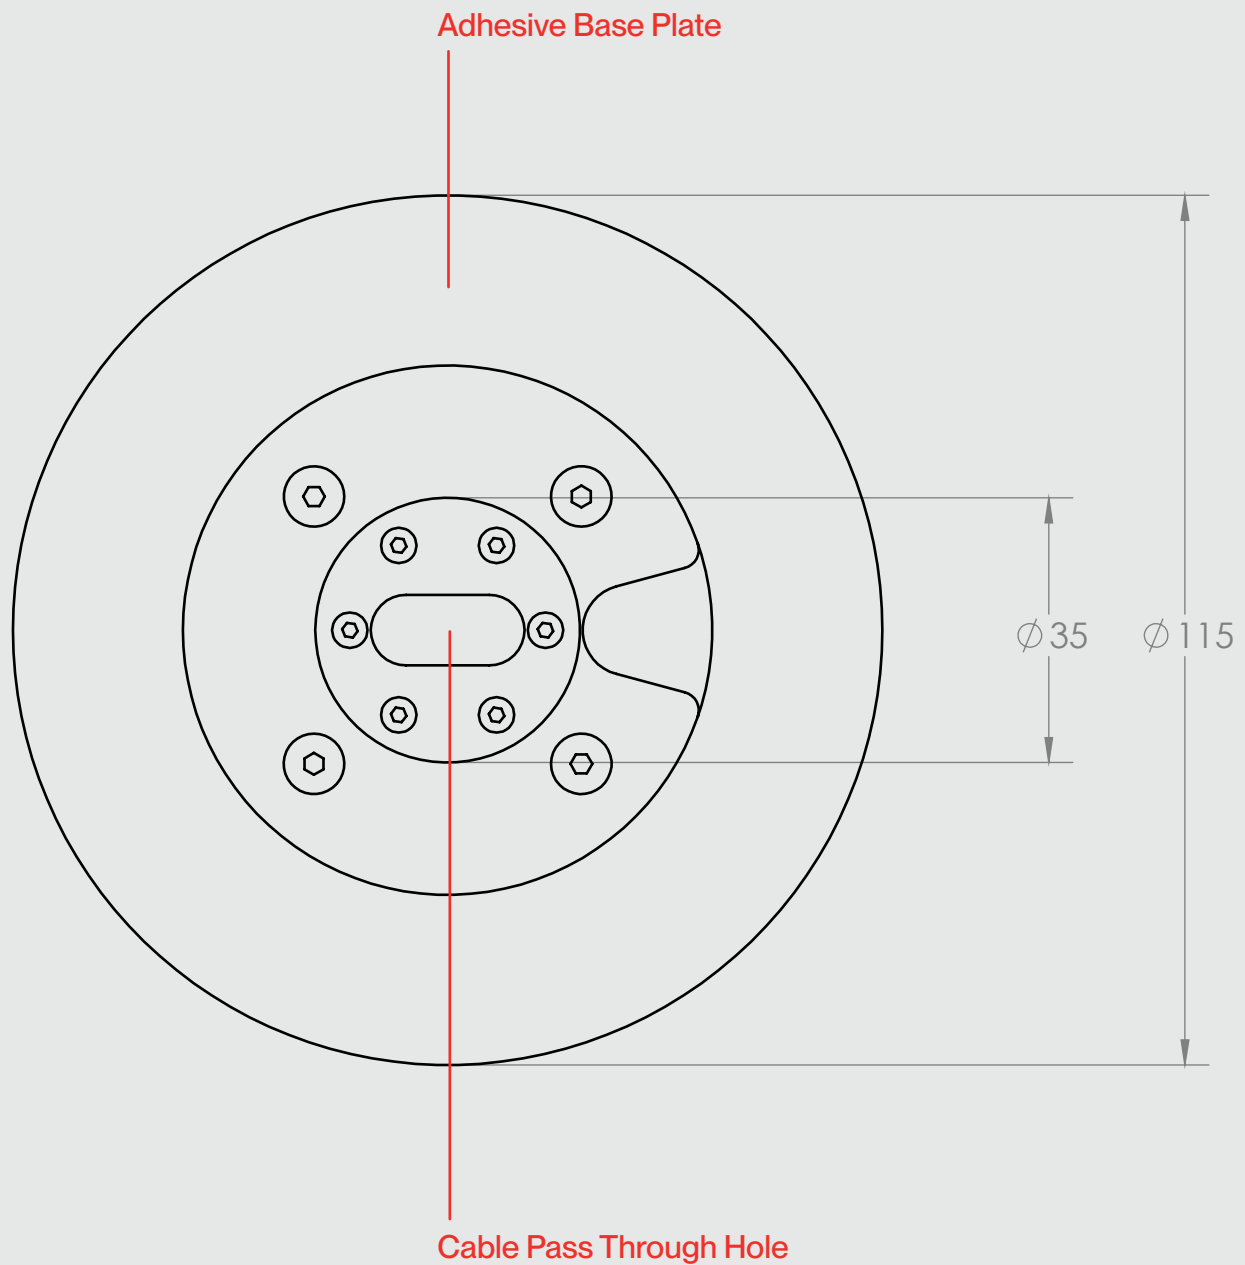


Instructions

Step 1:

Ensure chosen counter surface has been cleaned, for maximum adhesion strength.


Step 2:

Position the Powered Lock Belt onto the top surface of the Powered Swivel Stand, ensuring that the X-shaped cavity on the belt seats correctly into the corresponding X-shaped detail on the stand.

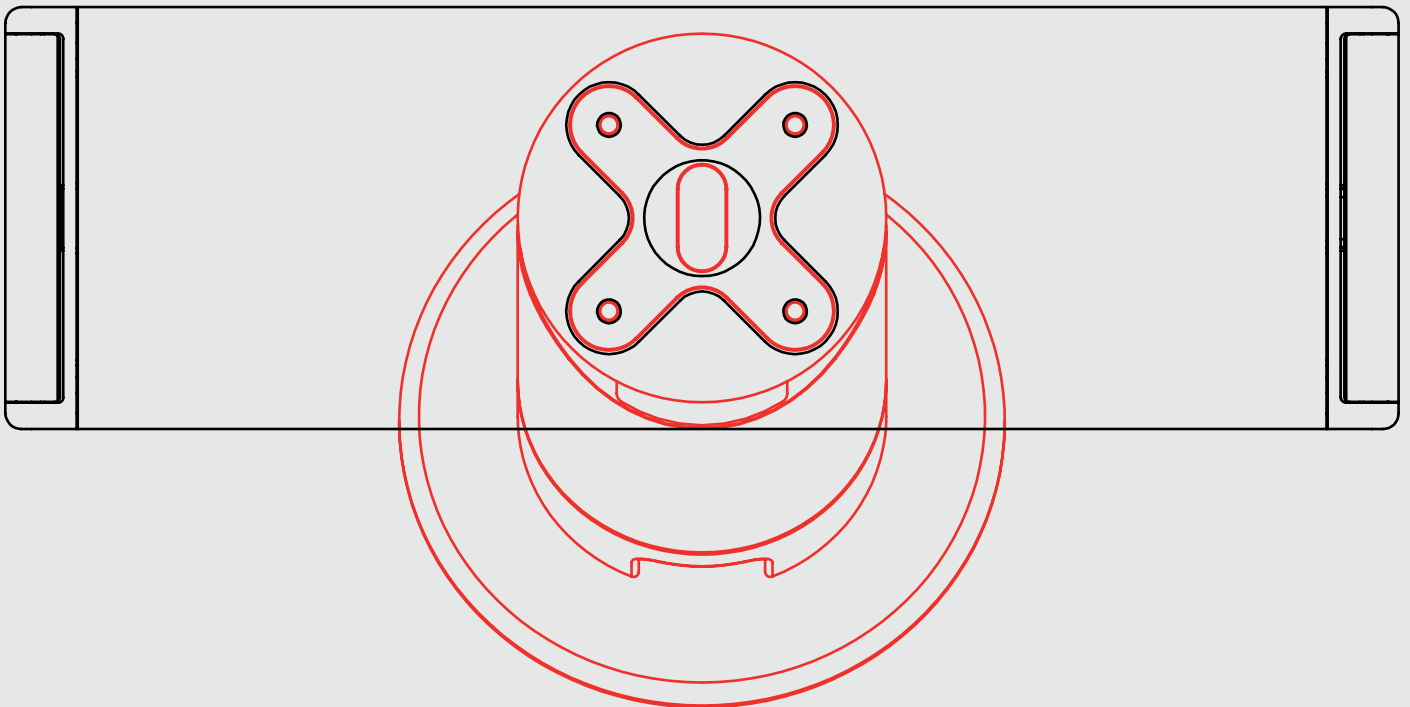

Step 3:


Using the four M4 fasteners, secure the Powered Lock Belt onto the Powered Swivel Stand until finger tight.

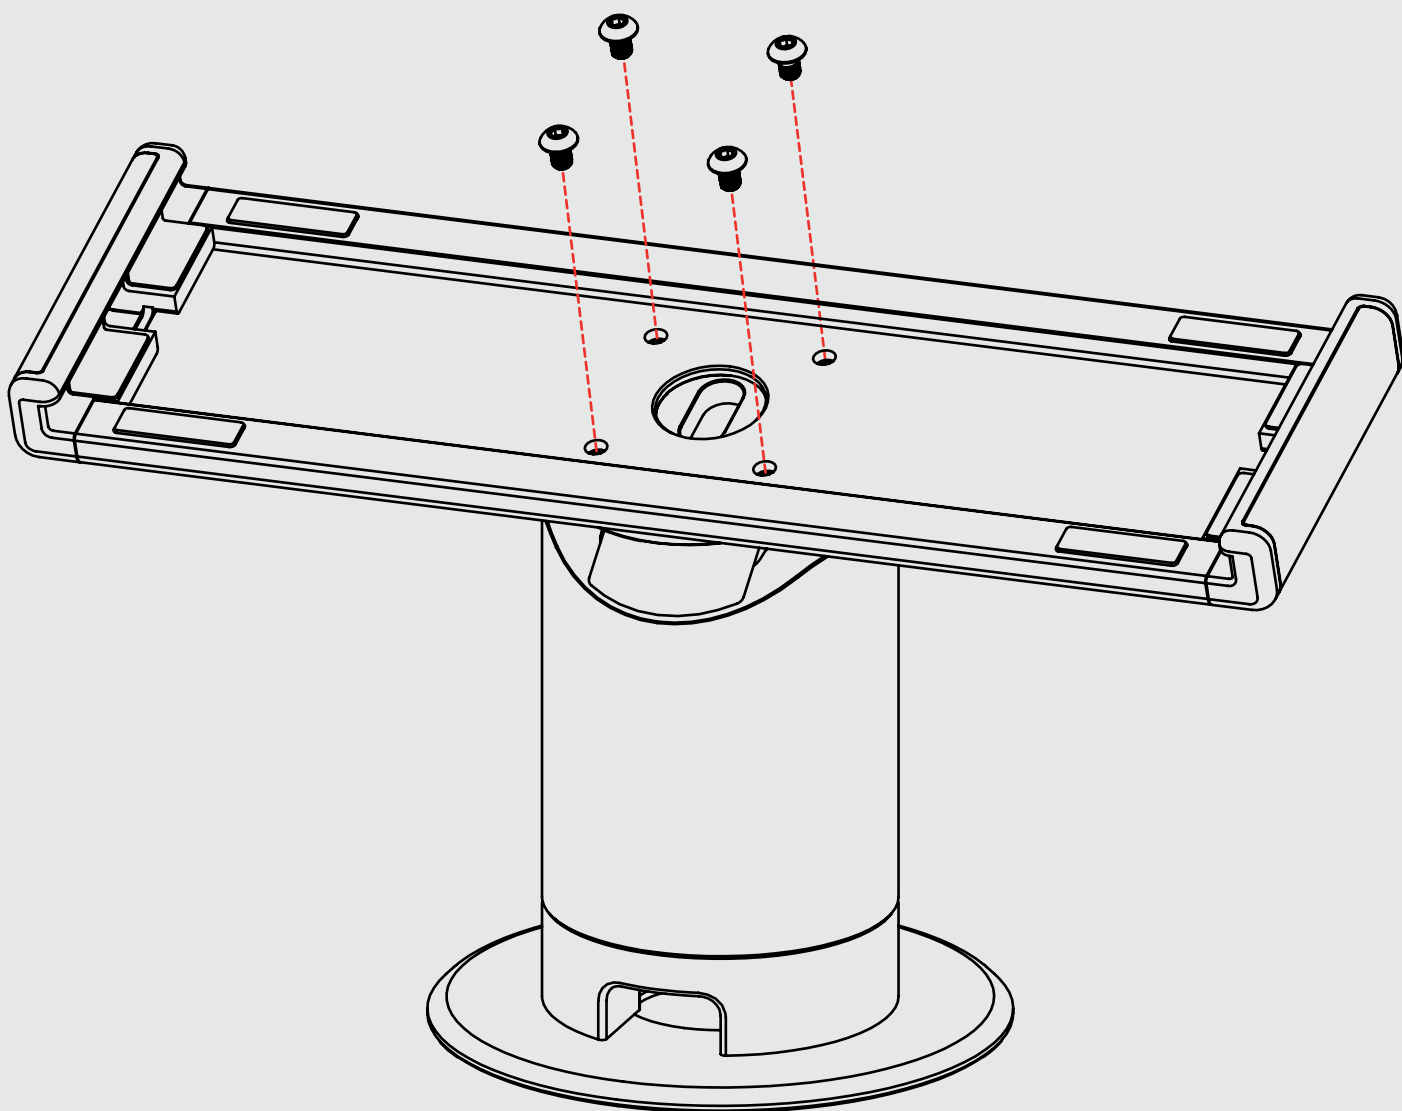

Step 4:


Before adhering the stand, decide how you want to route the cable based on your setup, either through the existing mouse hole or through a drilled pass-through in the countertop. Refer to the diagram below to compare the two routing options. Once you have selected the preferred route, feed the female end of the included USB-C cable down through the chosen opening.

For countertop hole drilling dimensions and placement, refer to the Base Dimensions drawing on page 3.

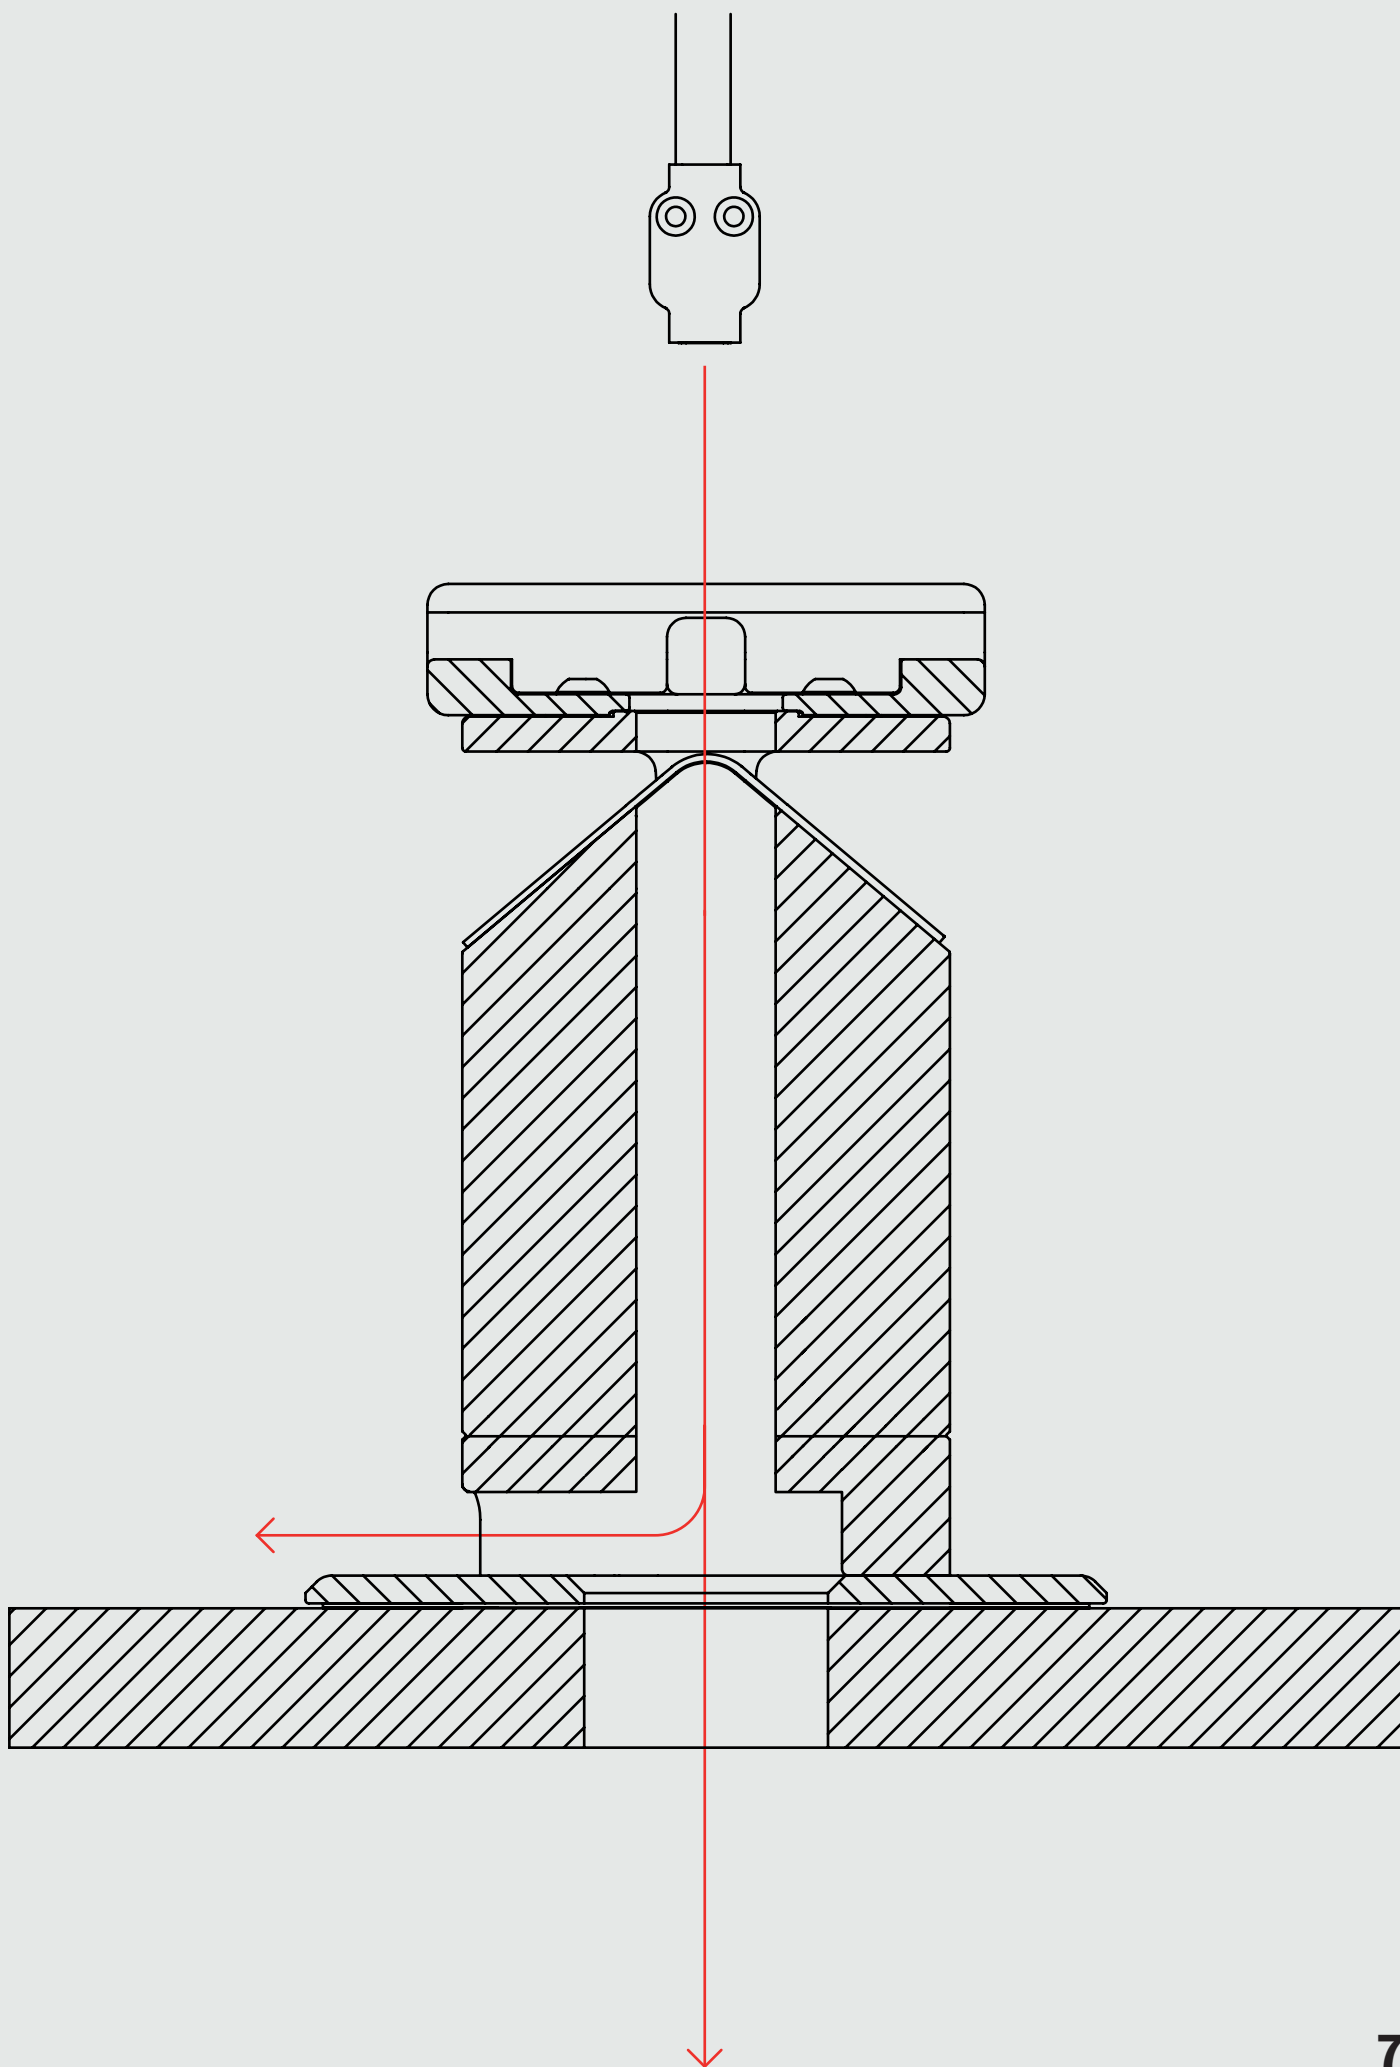

Step 5:

To permanently adhere the Powered Swivel Stand, gently remove the adhesive film using the pull tab as shown below.


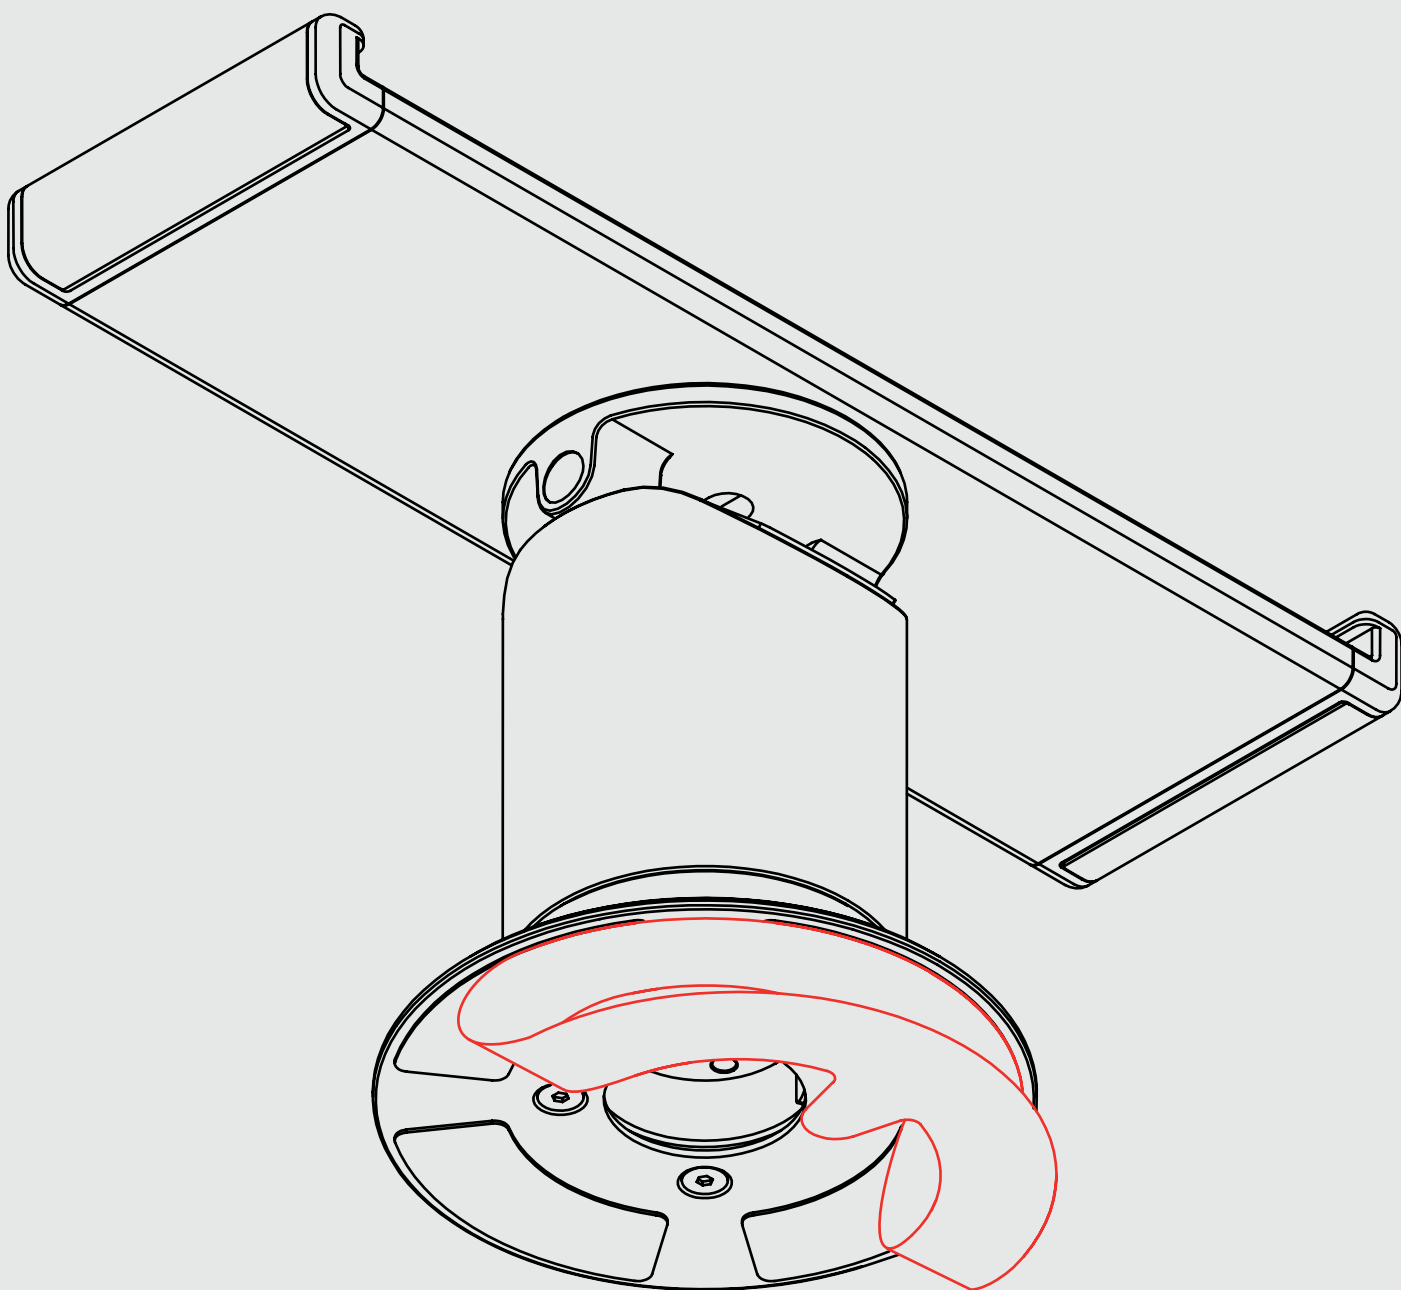


Step 6:

Carefully align and place the Powered Swivel Stand on to the chosen surface. Apply steady pressure for 20-30 seconds to ensure a strong bond.


Step 7:

To begin installing the iPad ,insert the male end of the cable into one of the two recessed side slots on the Powered Lock Belt end caps, as shown below. The slot selected will determine the mounted orientation of the iPad.

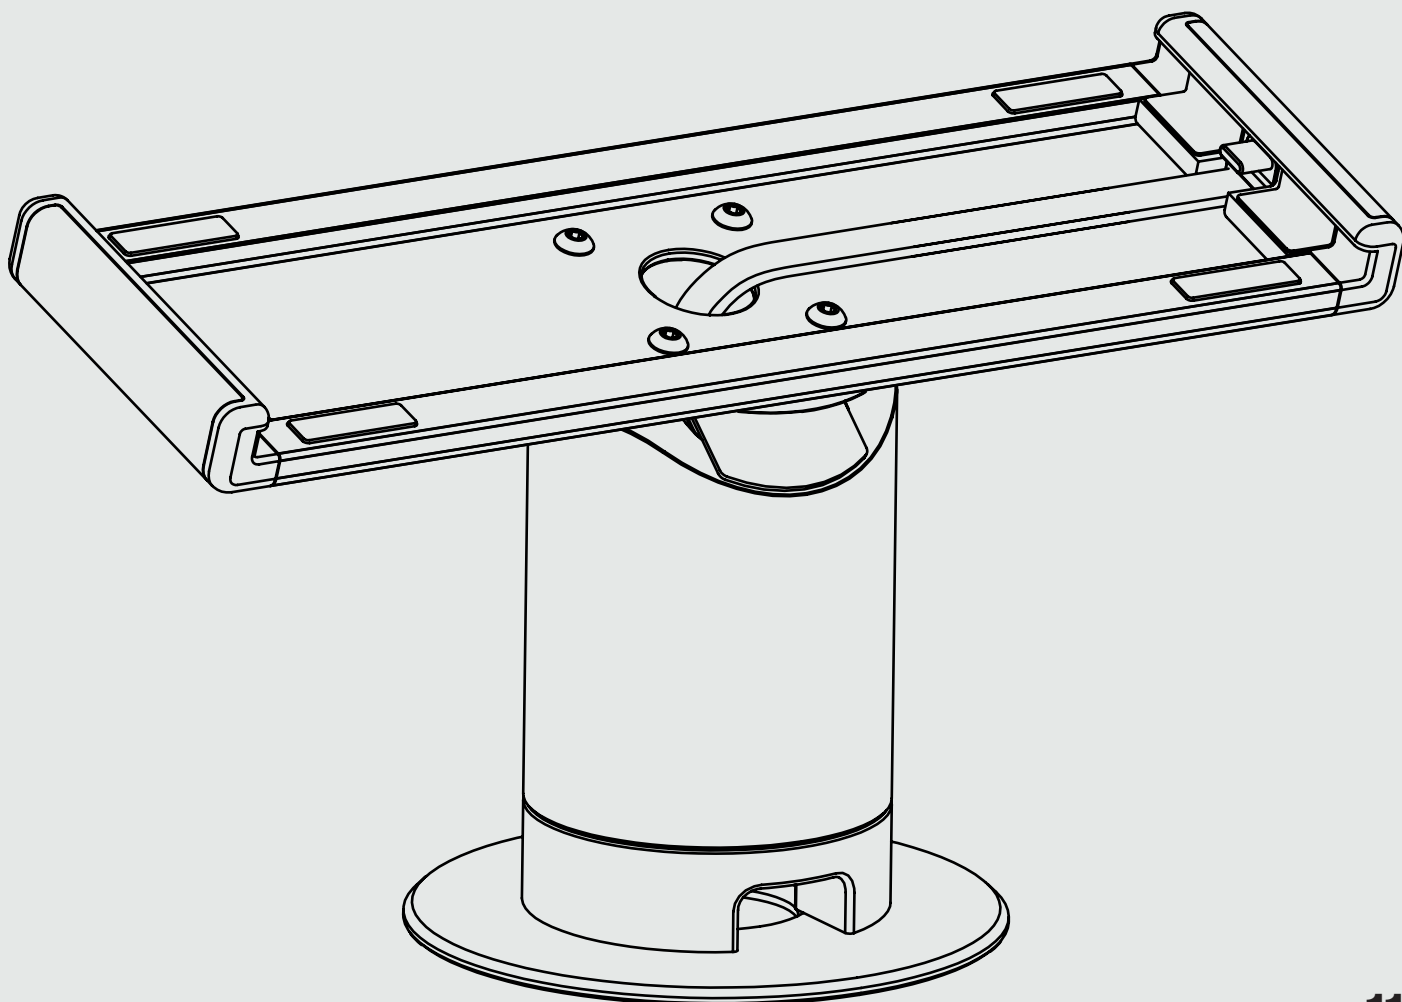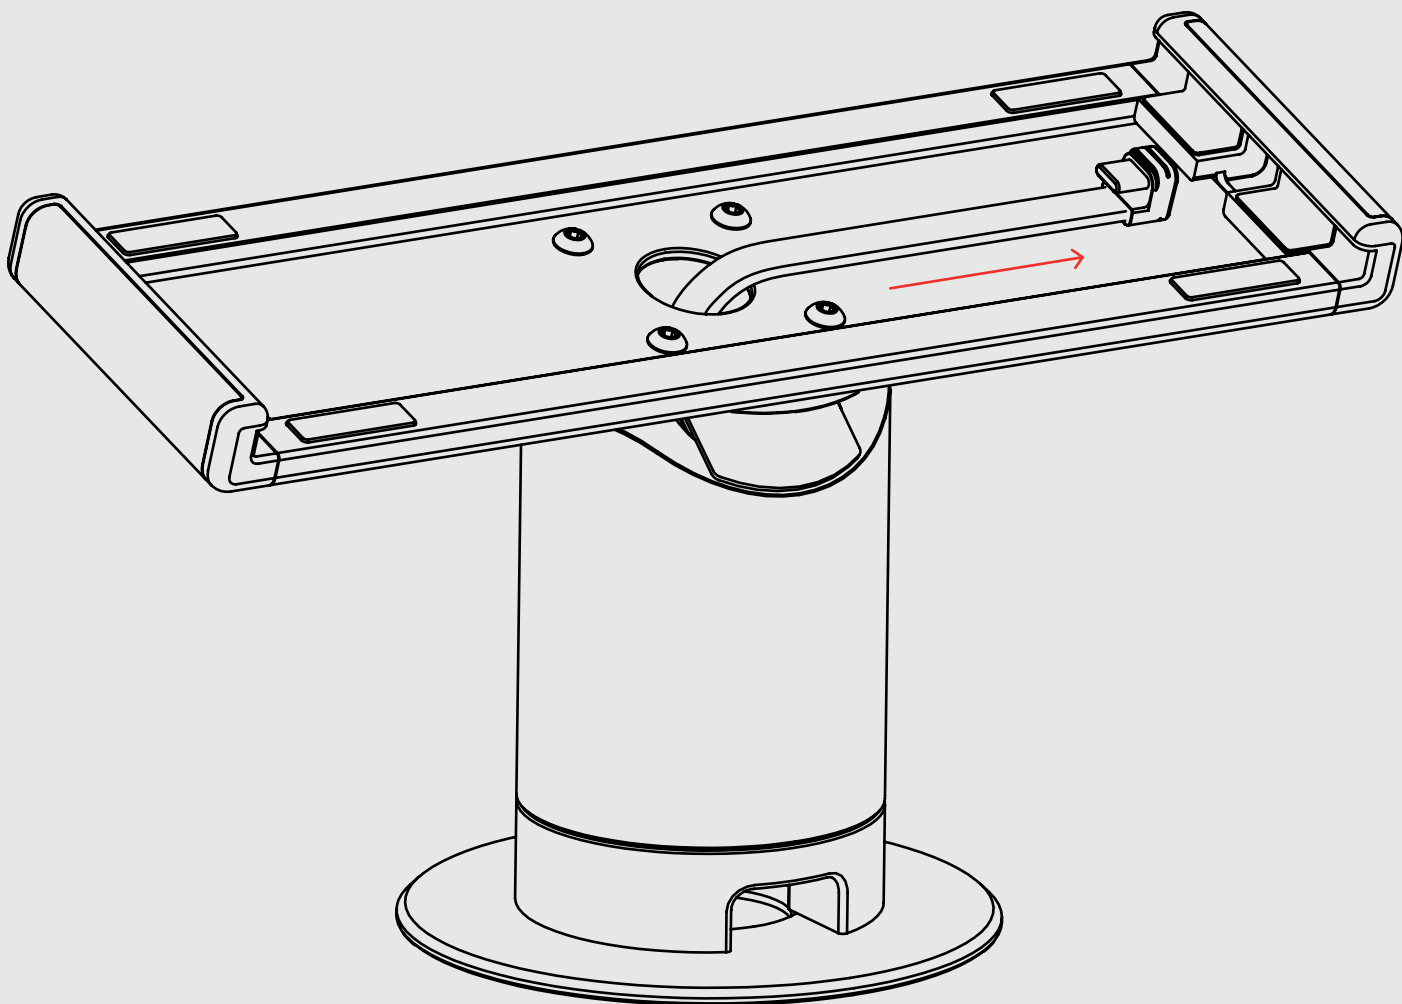


Step 8:

Remove the Powered Lock Belt end cap cover on the opposite side of the Lock Belt, using the thin groove located on the bottom as shown below.

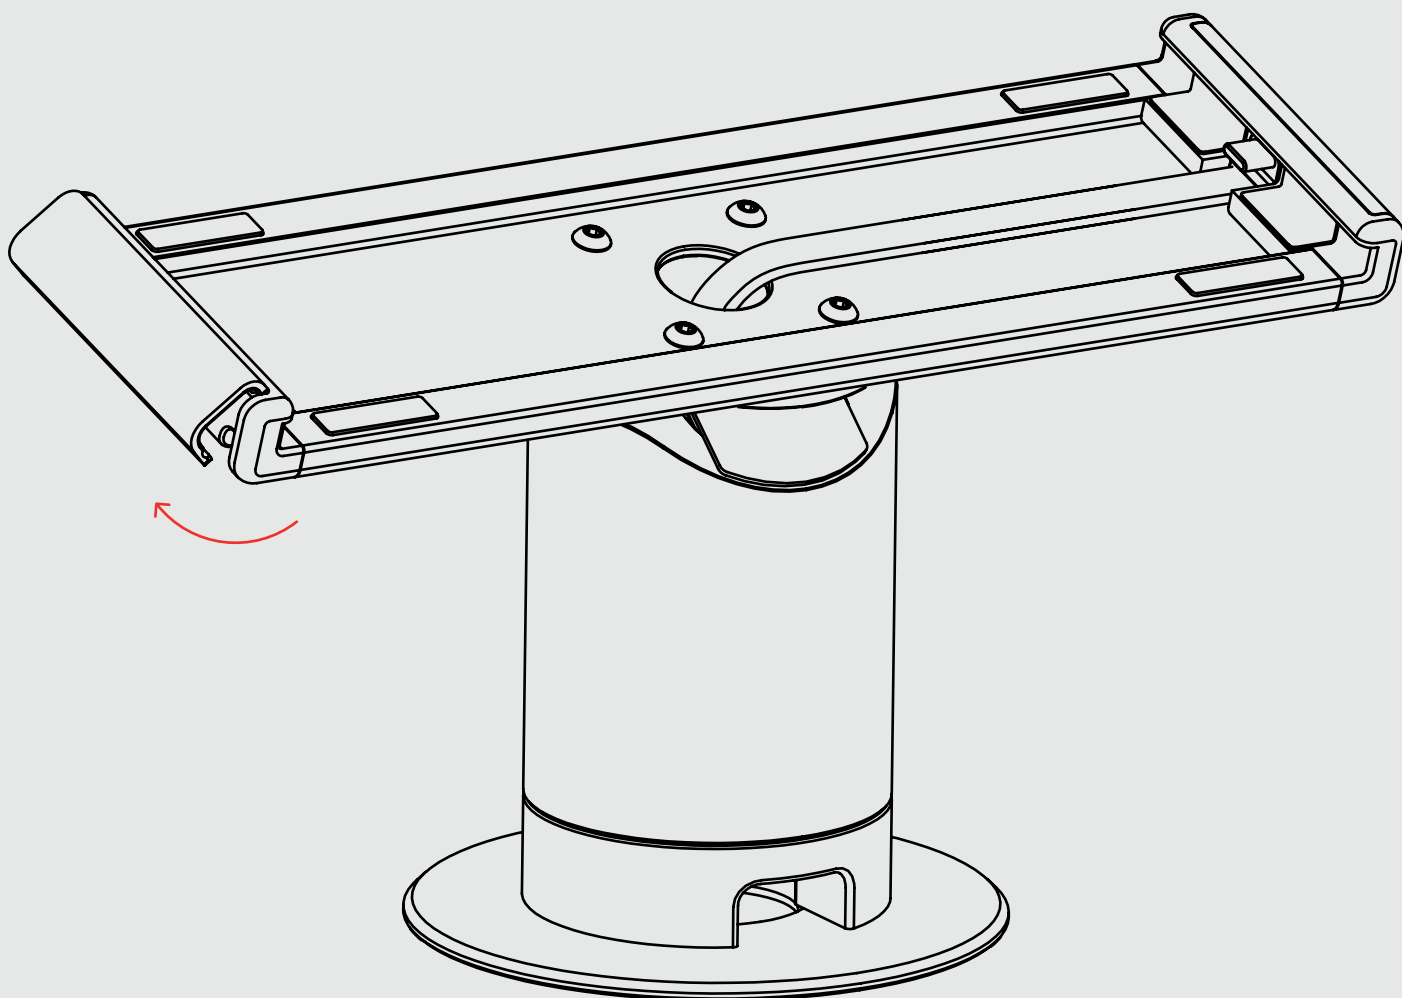


Step 9:

Using the provided tool, remove the two fasteners securing the Powered Lock Belt end cap, then remove the end cap as shown below.

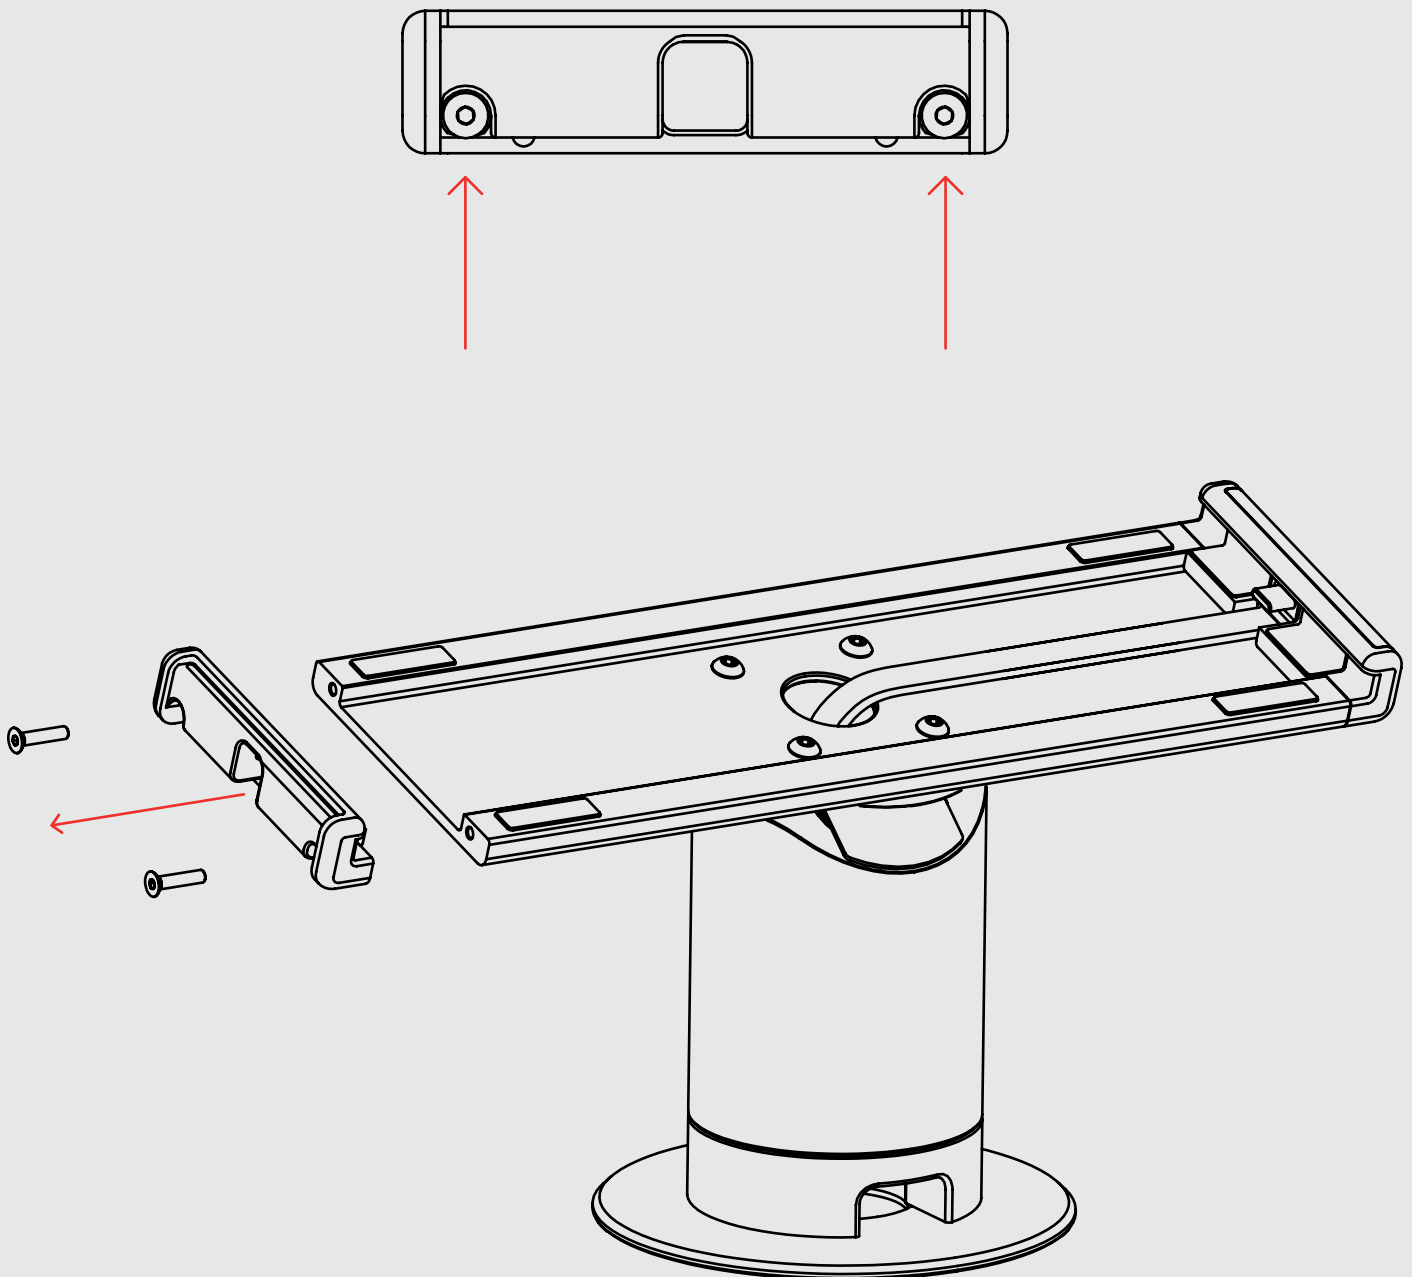

Step 10:

Place the iPad on the Lock Belt surface and slide it toward the USB-C port until the port engages. To confirm proper seating, connect the other end of the cable and perform a charging test.

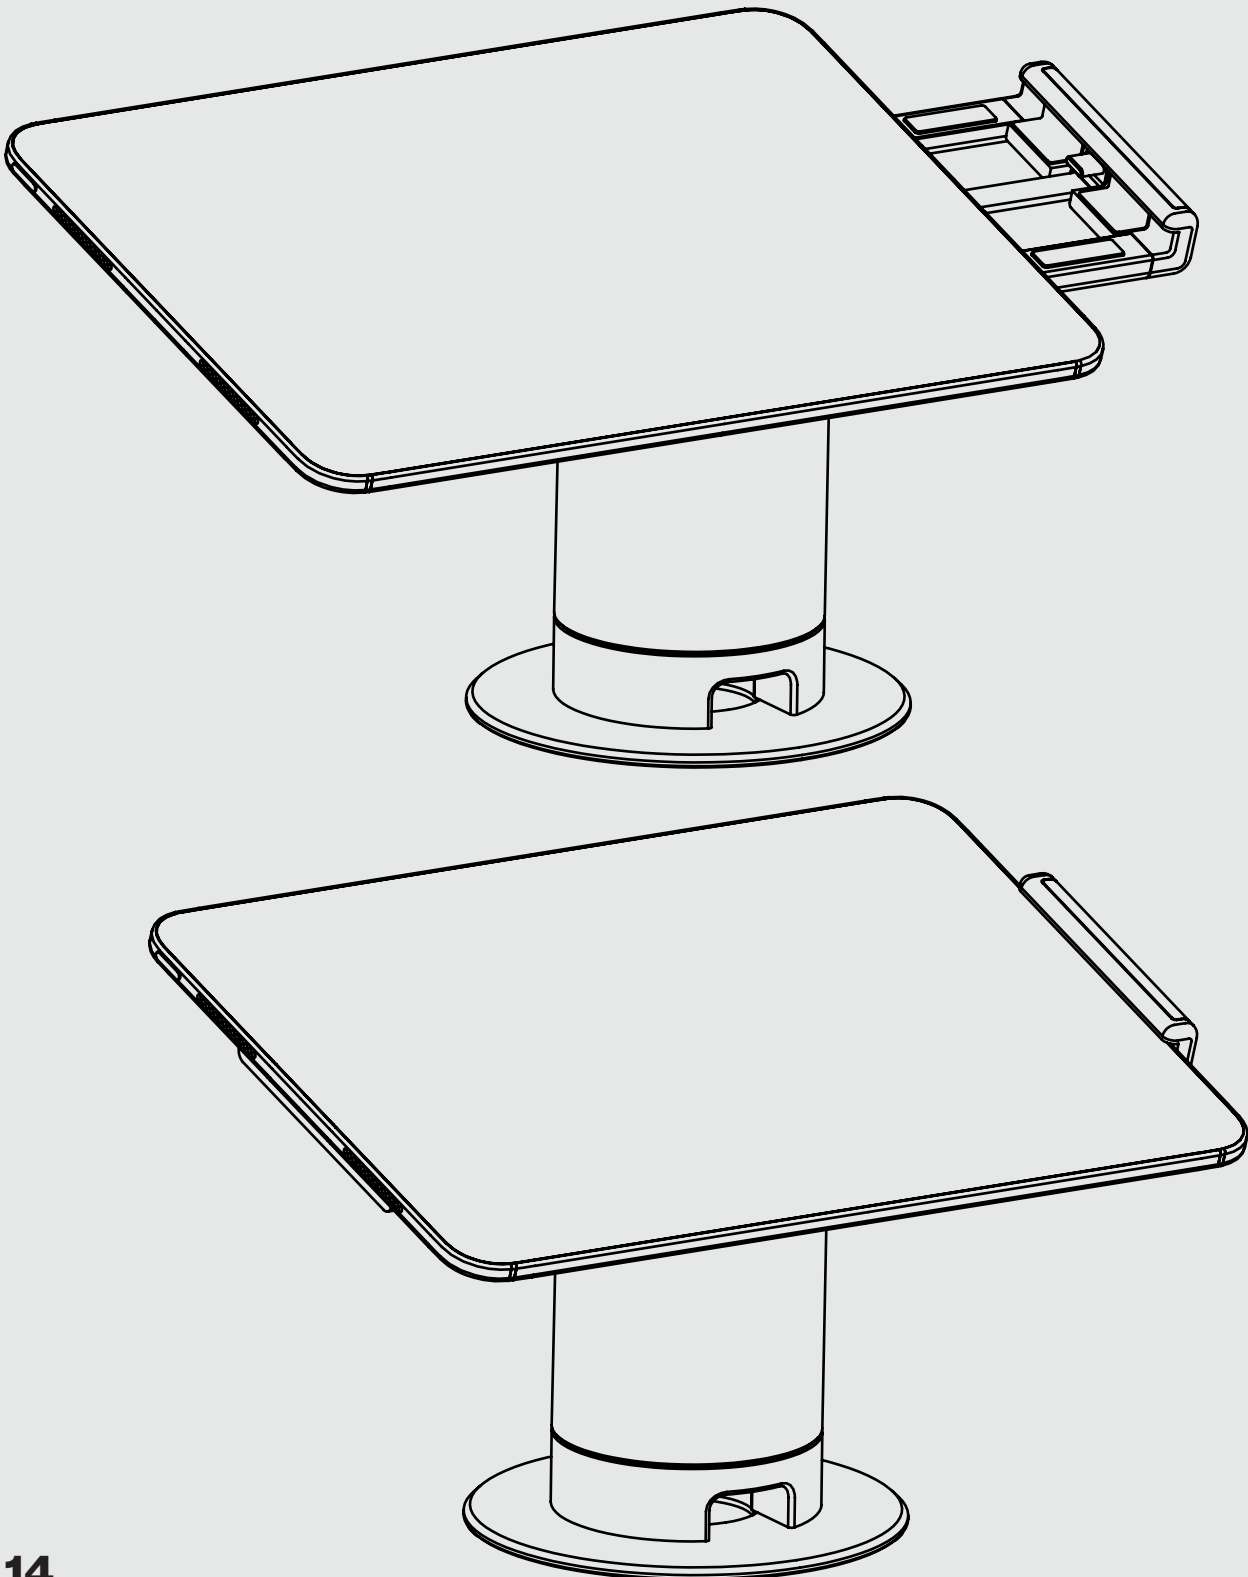

Step 11:

Once the iPad has been correctly seated, reattach the Powered Lock Belt end cap using the same fasteners, then reattach the end cap covers. Ensure the iPad is positioned straight and not at an angle during this step. After fastening, gently wiggle the iPad to confirm that it is securely locked in place.

