



Quick Start Guide

LT4521




Packing List

Standard



Printer



AC Adapter




Power Cord



Quick Start Guide



CD



USB Cable



Label Roll Sample




Ribbon Roll Sample


Note: The AC adapter and power cord vary by local or region.

Appearances and Components


Front

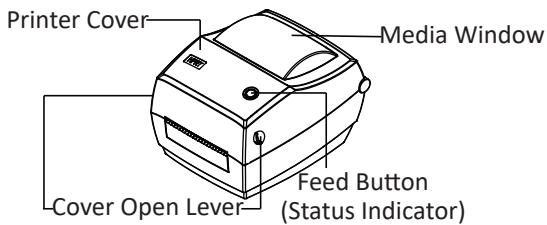

Rear

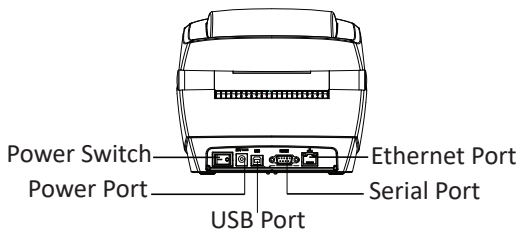


Inside

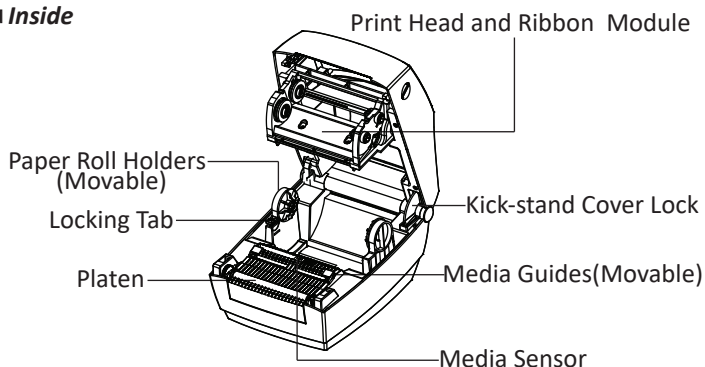


Note: Views above are for reference only, ports differ by your choice.

Media Loading


1. Press the left and right cover open lever with both hands simultaneously and lift the printer cover.




2. Slide the media holders to adjust the distance between them, and place the roll between the holders.




3. Make sure the holders are snugly against the sides of the media roll, and then press the locking tab down to lock the media holders in place.

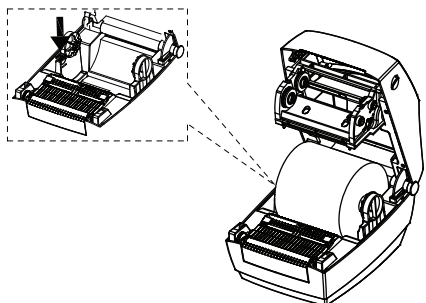

4. Pull some media and pass the media through media guides, adjust media guides according to the media width. Hold the printer cover while press the kick-stand cover lock leftwards.




5. Lower the top cover, press down until the cover snap close, tear the extra paper in the direction of printer.



Power Connection


1. Make sure the printer is "Off".
2. Connect the AC adapter to power interface.
3. Connect the AC adapter to a power cord.
4. Plug the other side of power cord into the socket outlet.

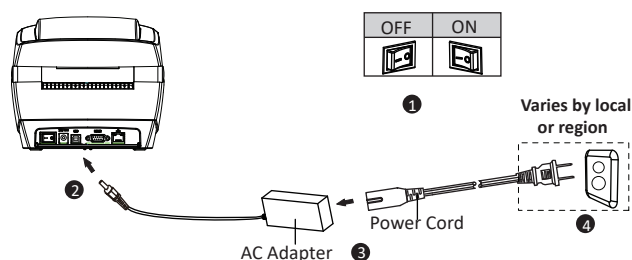


Note: Windows Driver installation please see LT4521 User Manual.

Ribbon Loading


1. Open the printer cover, the print head module will open automatically.

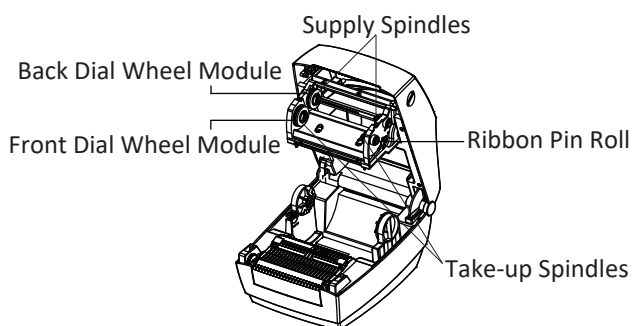

2. Put the take-up spindle core across the print head module from top to bottom, put the supply spindle core into supply spindles, right locked to ribbon pin roll, left locked to back dial wheel module. Same way to install take-up spindle core.

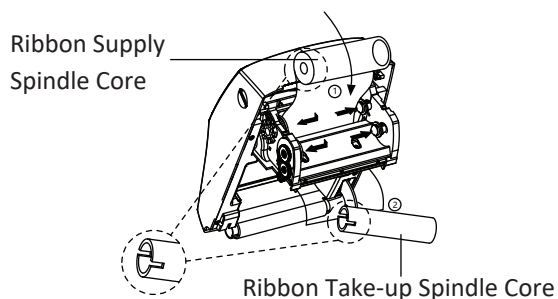

3. Pull some ribbon out, pass through print head. Stick the ribbon to the bare core. Use the adhesive strip on new rolls; otherwise, use tape.



4. Turn the ribbon take-up gear counter-clockwise to remove slack from the ribbon.
5. Close the printer cover and the print head module will automatically fold up.

