


# KIOSK01 (gen 2)

PROPER

# VESA Mount


---

User Guide

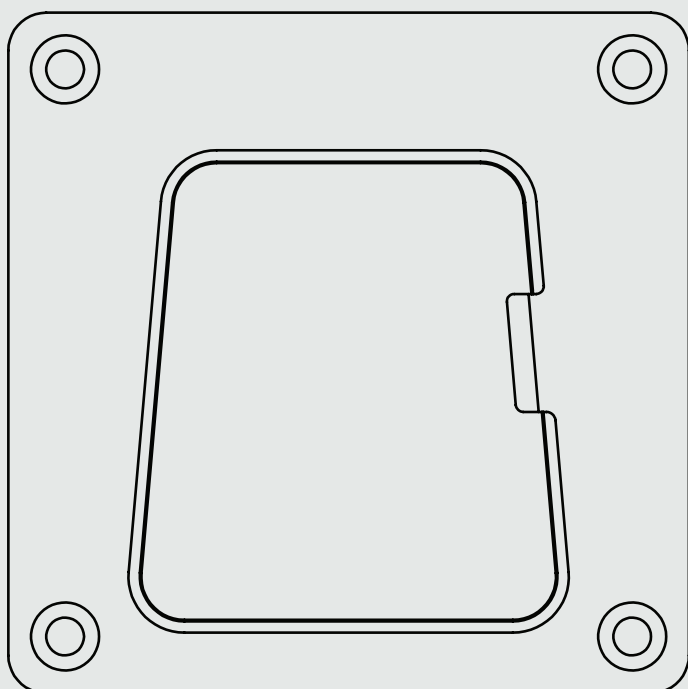

## What is Included


1x VESA Mount plate

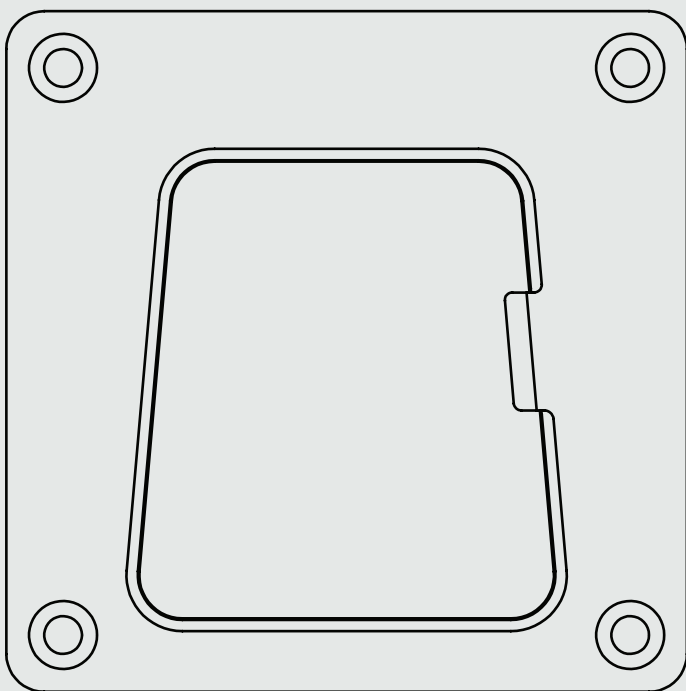

# Instructions

## Step 1:

Check that your chosen VESA compatible base (e.g., monitor arm) is compatible with the following dimensions of the VESA Mount. Ensure the chosen base is secure before proceeding to the following steps.

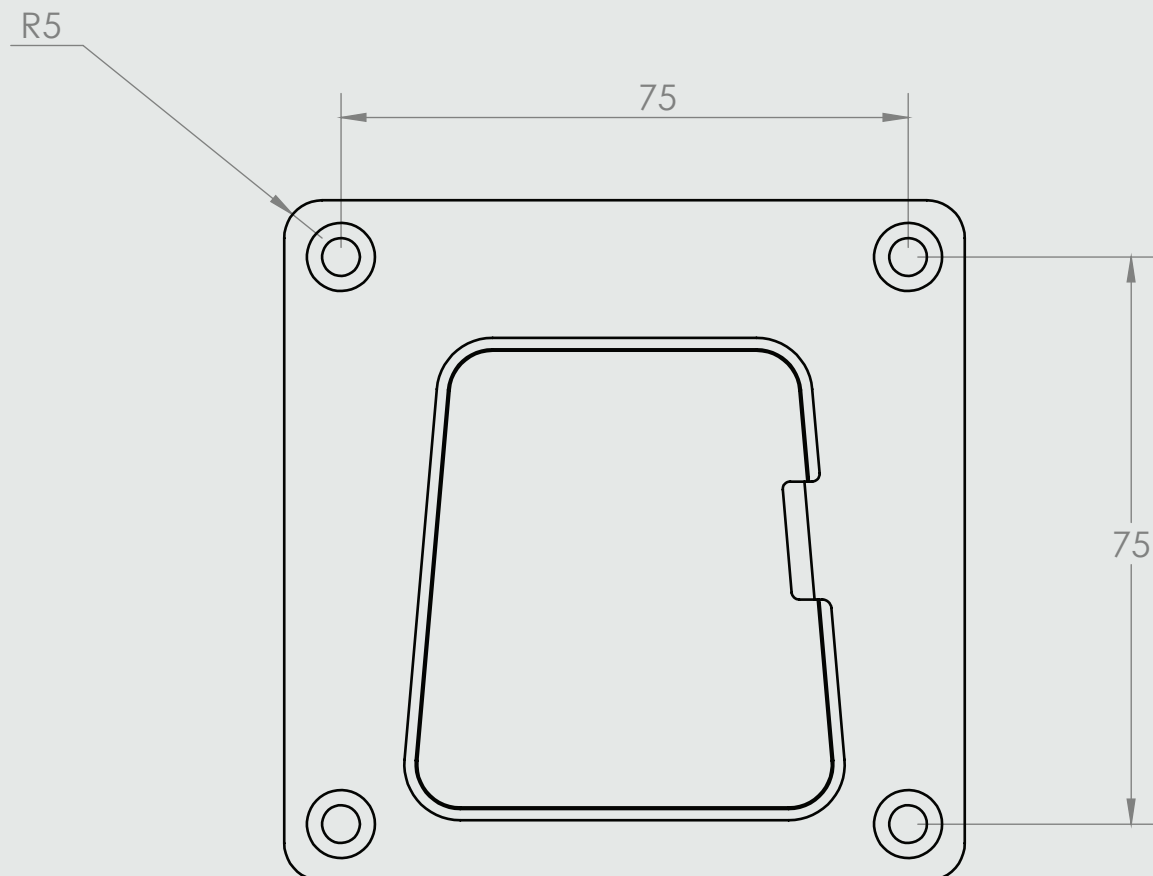


**Step 2:**

Secure the VESA Mount to the VESA compatible base using the hardware included with your chosen base. Make sure the orientation of the VESA Mount is as shown in the drawing on Step 1 with the narrow end of the mount towards the top.


**Step 3:**

To mount KIOSK01 to the VESA Mount, remove the two fasteners and latch cover located on the side of the KIOSK01 exposing the latch button.

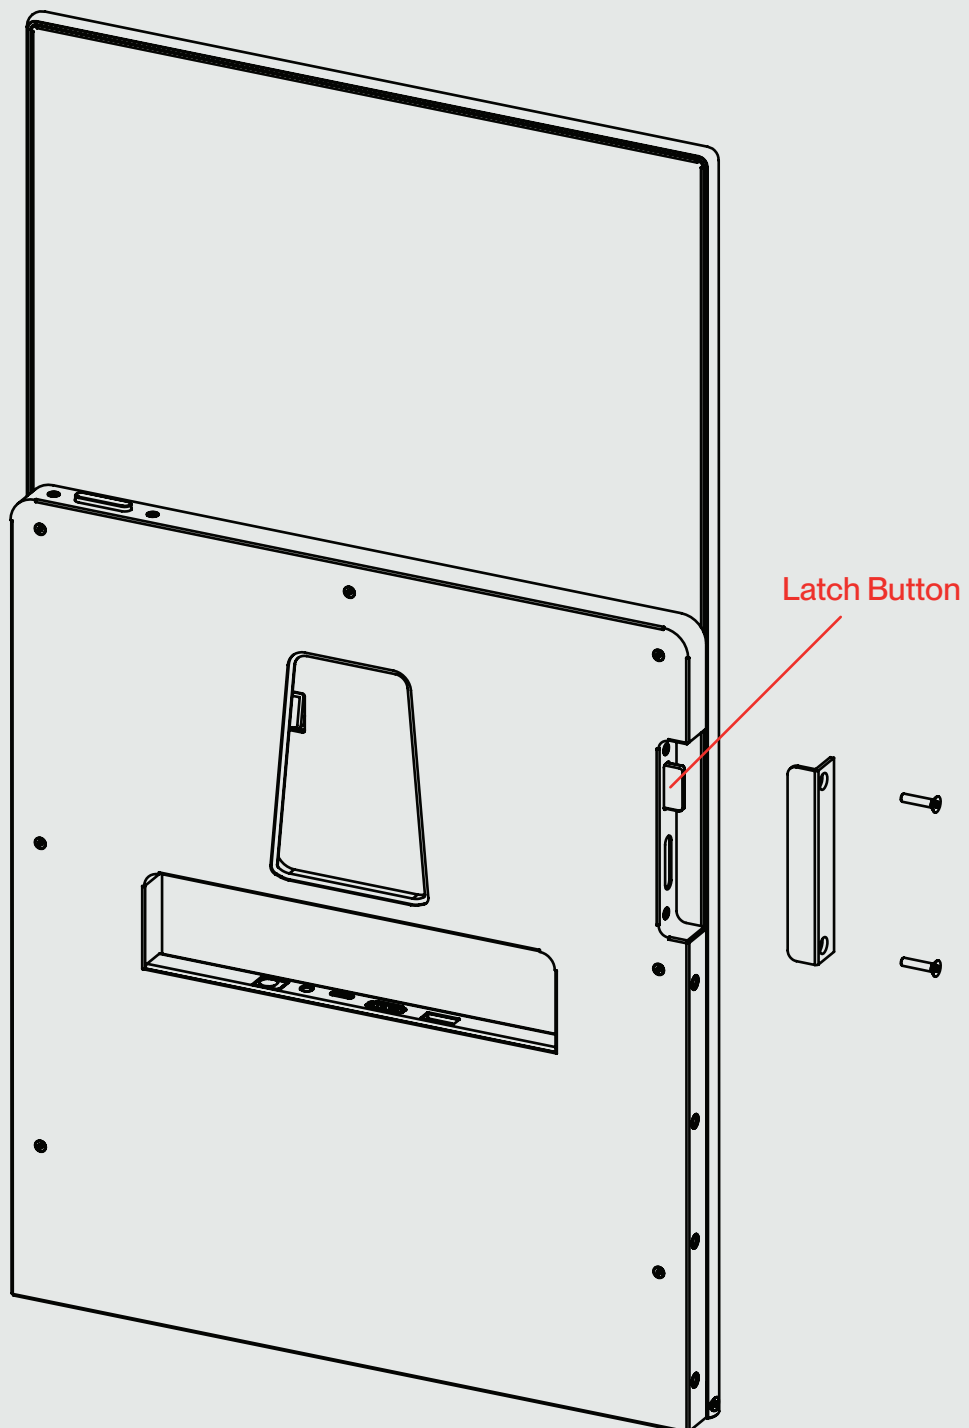

**Step 4:**

Begin by carefully aligning the KIOSK01 rear mount opening to the protrusion on the VESA Mount as shown below.


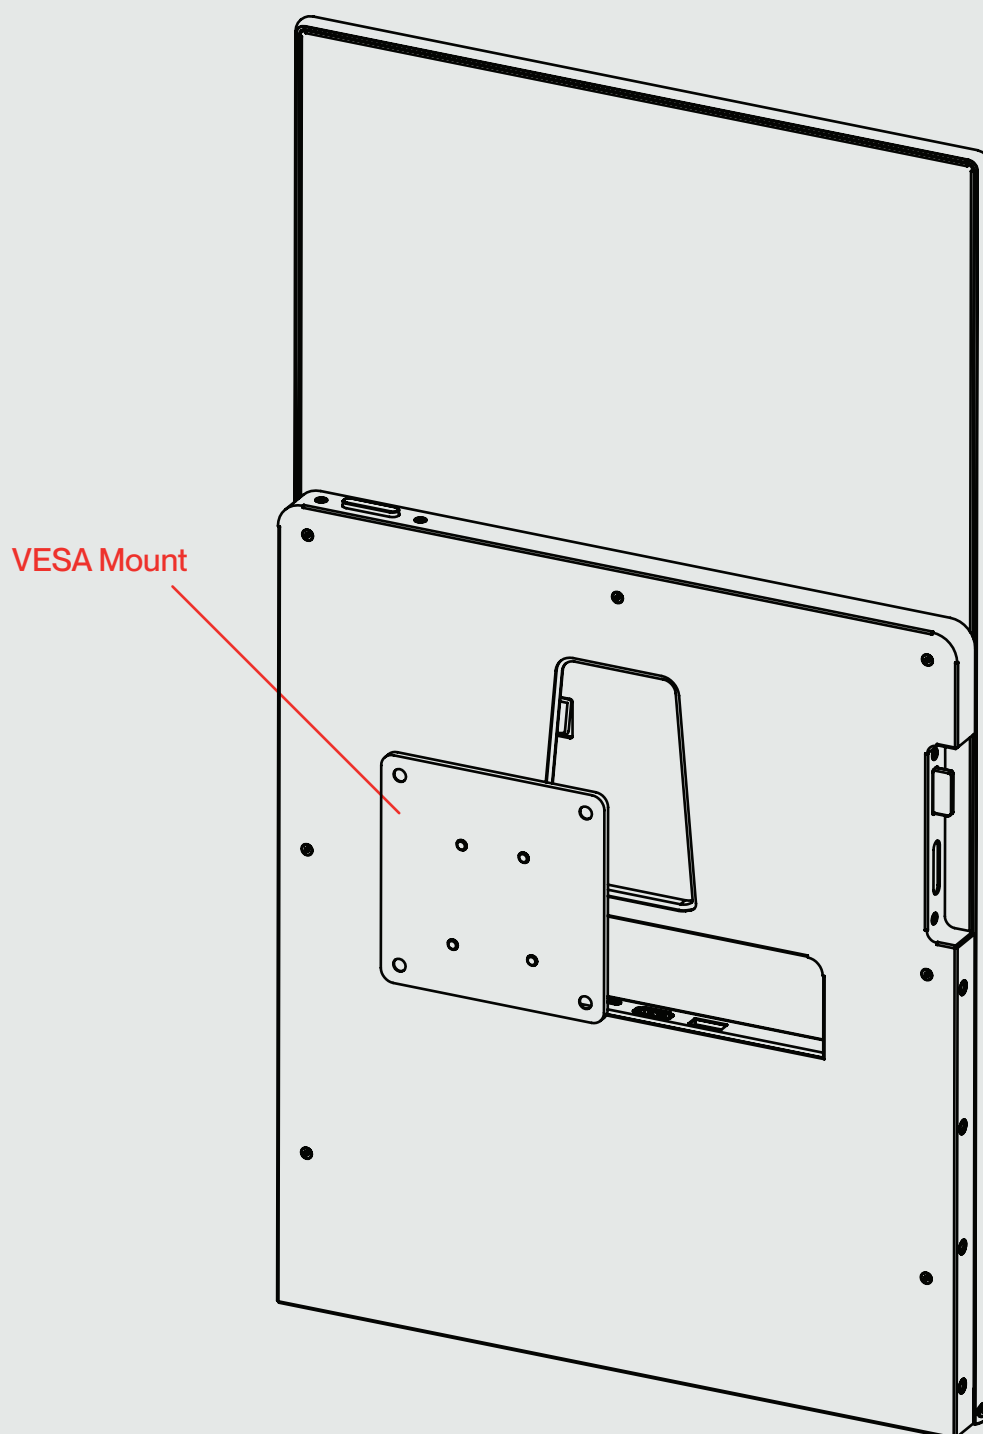


**Step 5:**

While pressing the side latch button, push the KIOSK01 toward the VESA Mount until the protrusion seats securely in the mount opening.

Keeping the KIOSK01 flush against the mount (1), carefully slide it downward until it no longer moves (2). Release the latch button to lock it in place.

Before letting go of the KIOSK01, gently wiggle it to confirm that it is securely mounted.

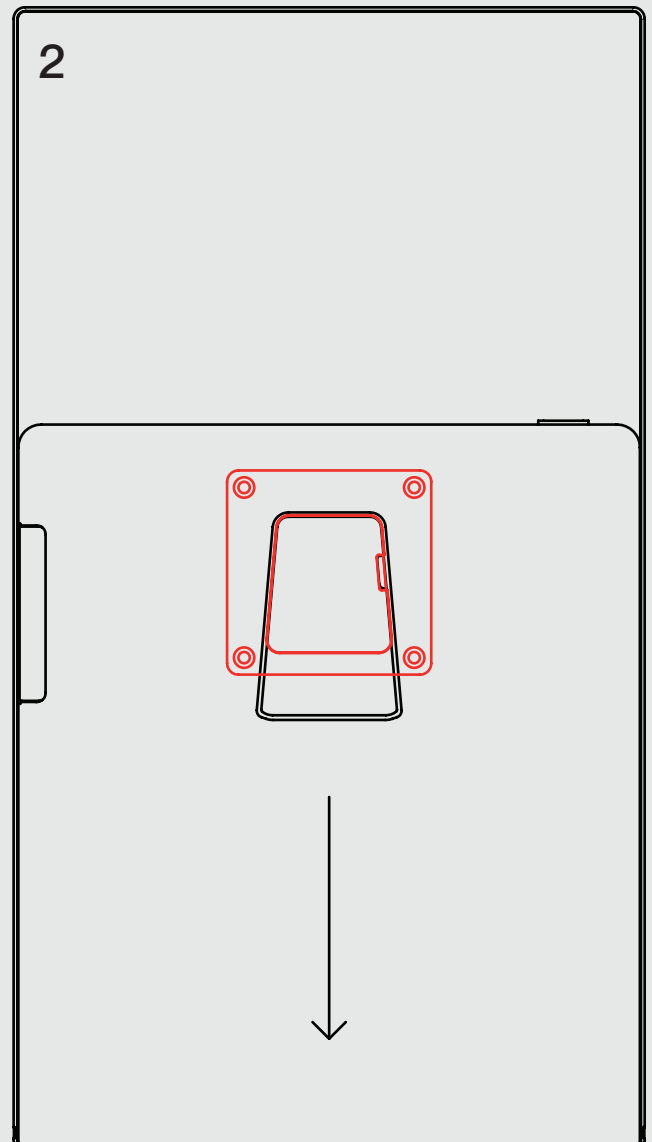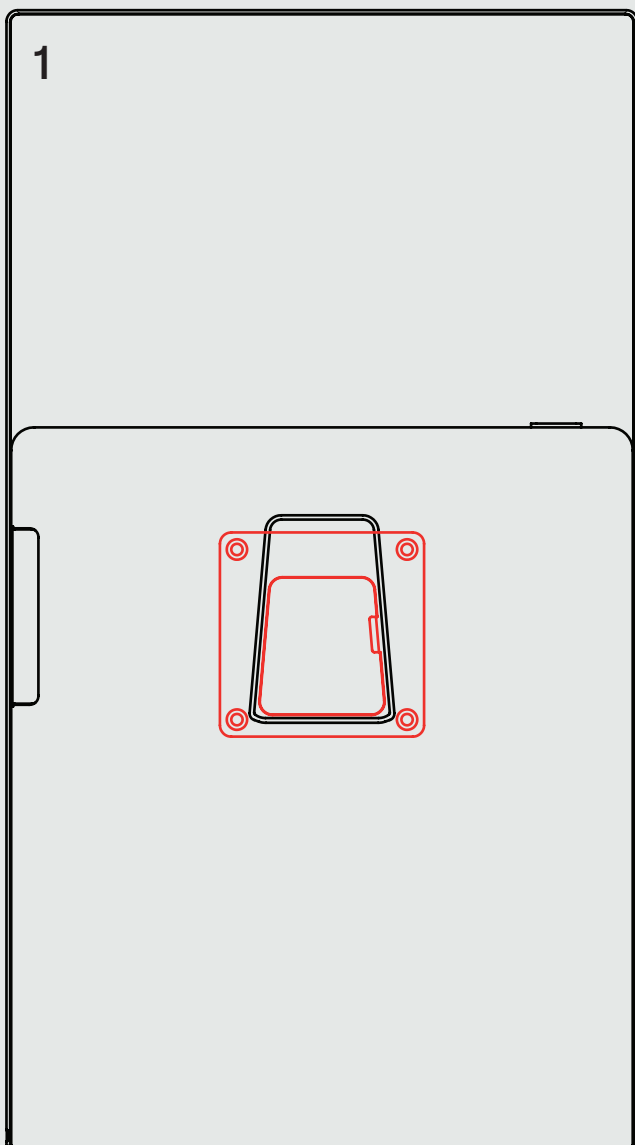

**Step 6:**

Finally, re-fasten the latch cover on the KIOSK01.

