

Powered iPad Stand


PROPER

User Guide




What is Included


1x Powered iPad Stand



1x iPad Powered Lock Belt



4x M4 Fasteners




1x 180° USB-C Cable



Base Dimensions

For installations requiring a countertop pass-through for the Powered iPad Stand, please refer to the drawing below.

Units: mm

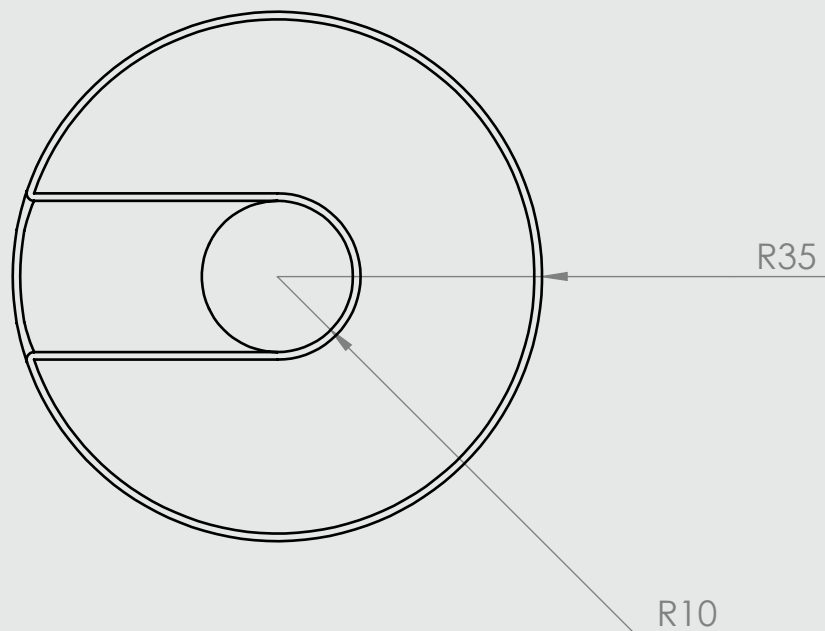

Instructions

Step 1:


Ensure chosen counter surface has been cleaned, for maximum adhesion strength.

Step 2:

Before permanently mounting, align the Powered iPad Stand on your chosen surface, ensuring the slant faces the operator. Temporarily securing the accompanying Powered Lock Belt to the stand can also help with alignment and placement. Marking the table can also help in this step.

Step 3:

To permanently adhere the Powered iPad Stand, gently remove the adhesive film using the pull tab.

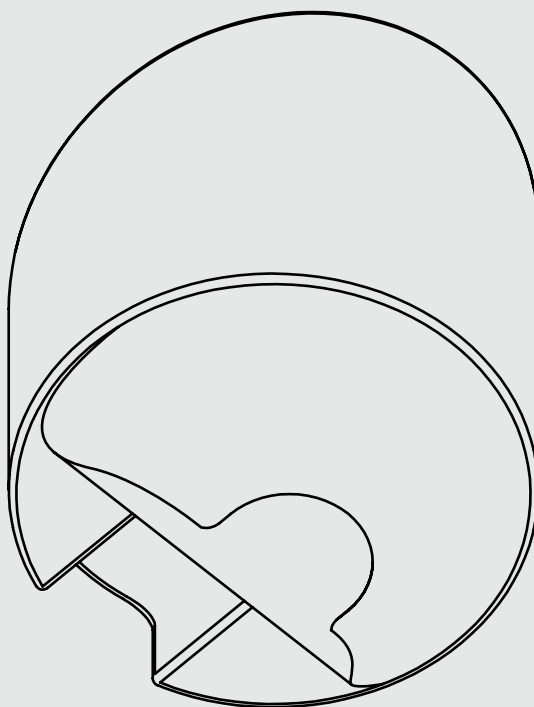


Step 4:

Carefully align and place the Powered iPad Stand on to the chosen surface. Apply steady pressure for 20-30 seconds to ensure a strong bond.


Step 5:

Once securely adhered, position the Powered Lock Belt onto the slanted top surface of the stand, ensuring that the X-shaped cavity on the belt seats correctly into the corresponding X-shaped detail on the stand.

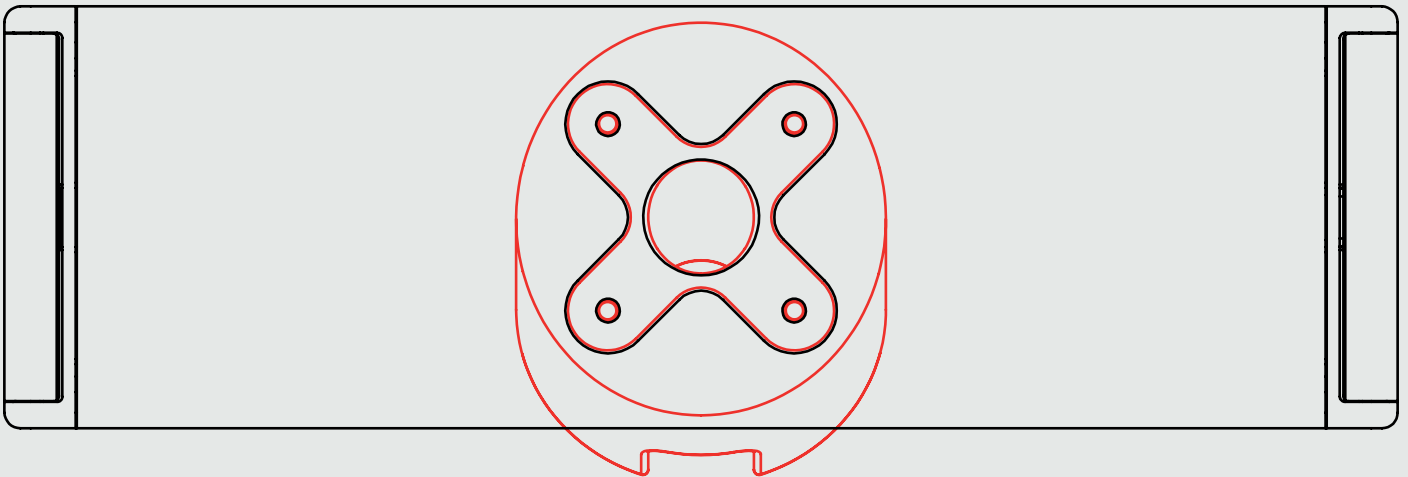


Step 6:

Using the four M4 fasteners, secure the Powered Lock Belt onto the Powered iPad Stand until finger tight.

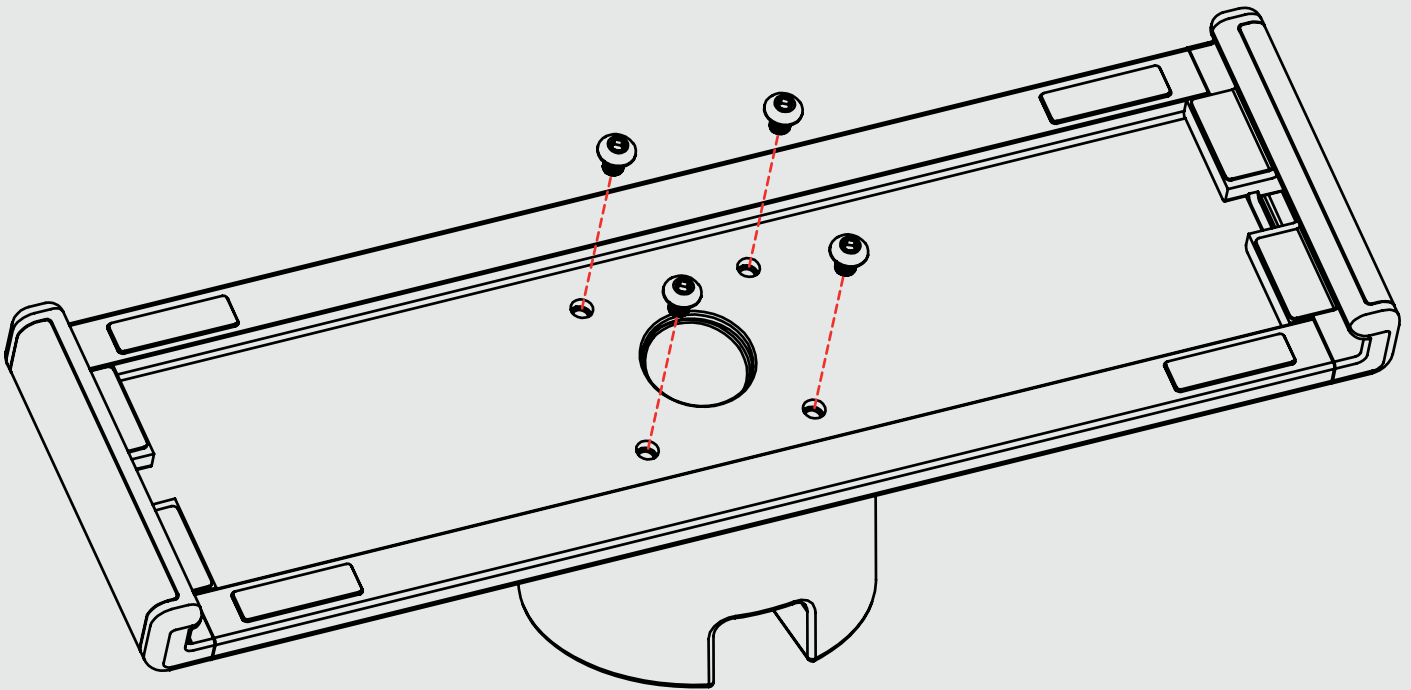


Step 7:

Route the female end of the included 180° USB-C cable down the center hole and out of the built in mouse hole or down through the countertop.

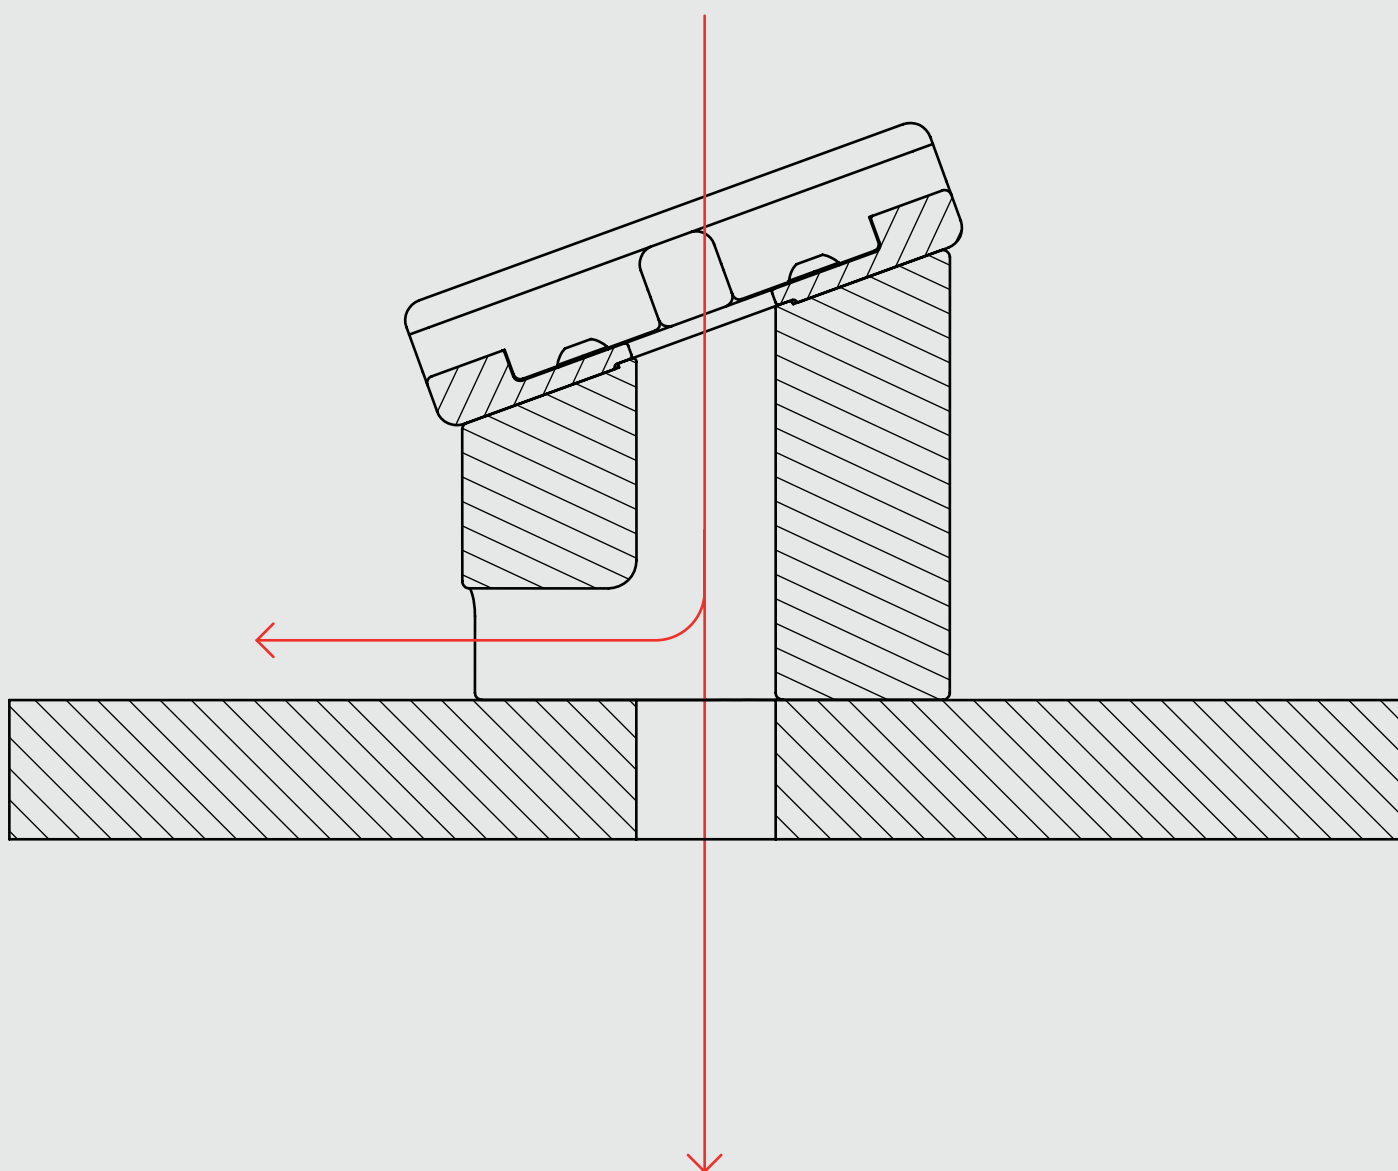


Step 8:

Insert the male end of the cable into one of the two recessed side slots on the Powered Lock Belt end caps, as shown below. The slot selected will determine the mounted orientation of the iPad.

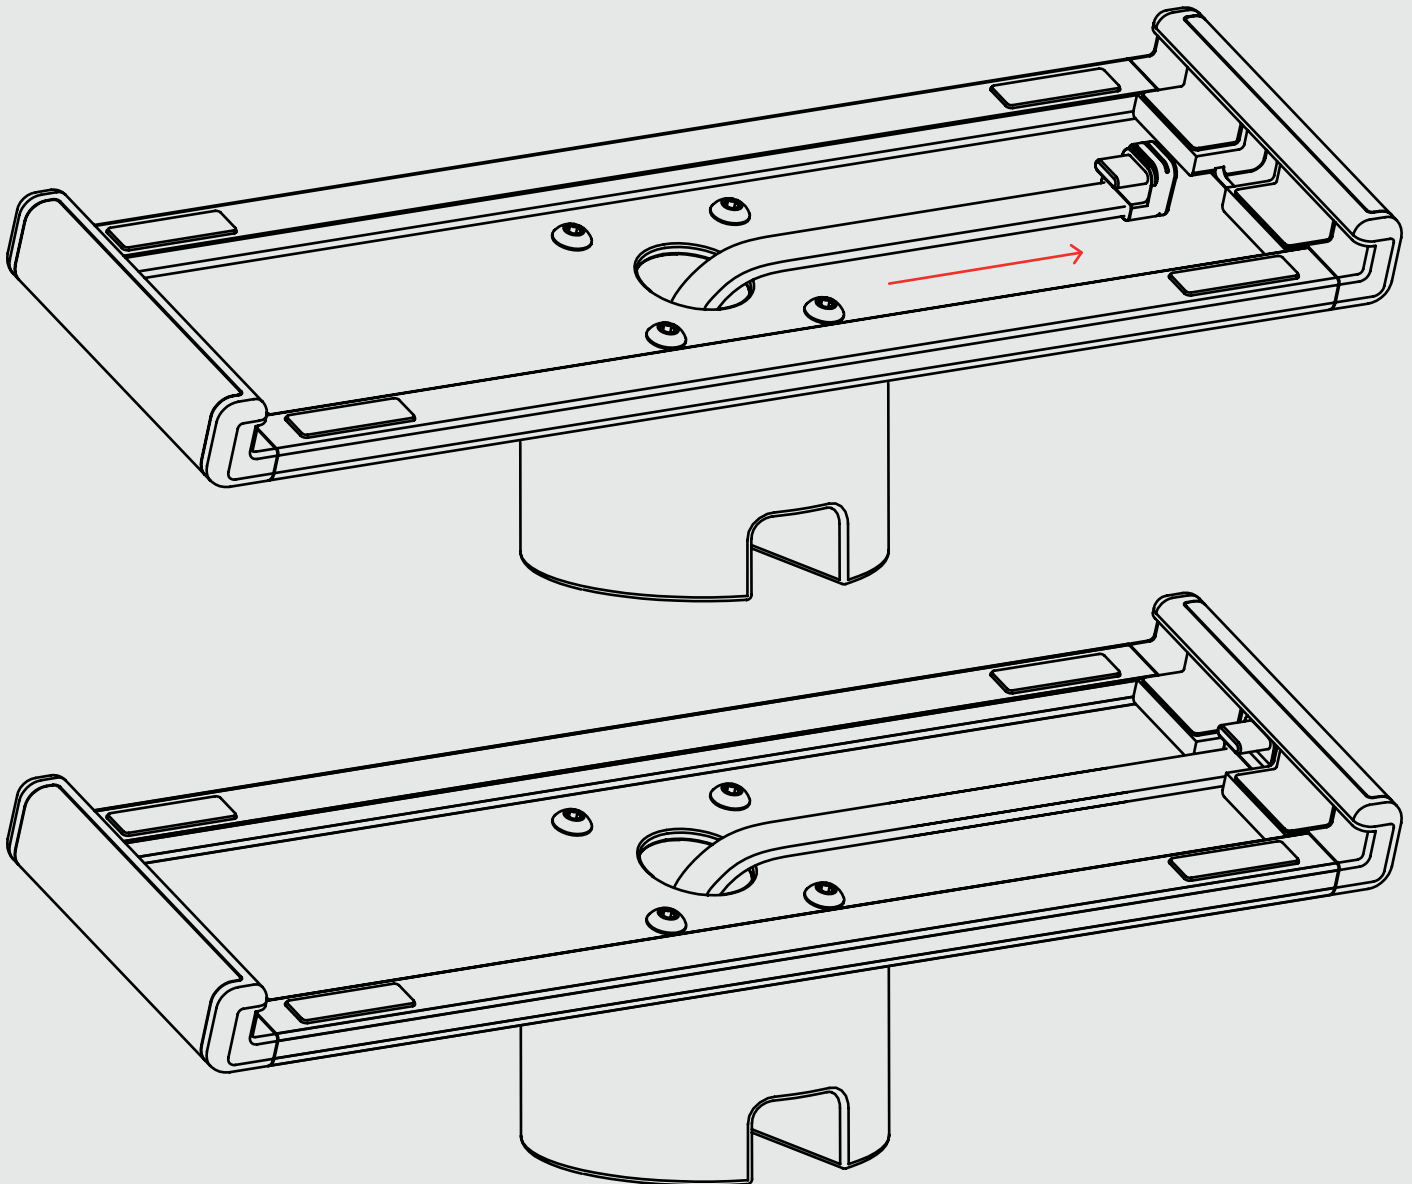


Step 9:

Remove the Powered Lock Belt end cap cover on the opposite side of the Lock Belt, using the thin groove located on the bottom as shown below.

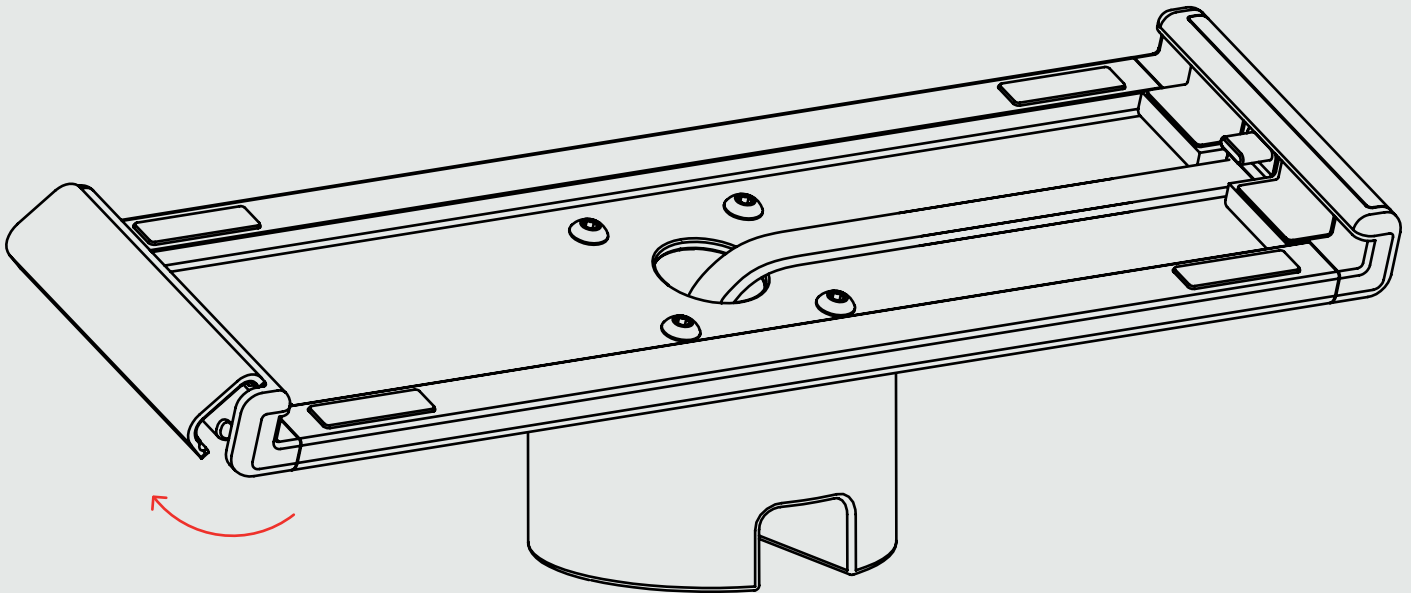


Step 10:

Using the provided tool, remove the two fasteners securing the Powered Lock Belt end cap, then remove the end cap as shown below.

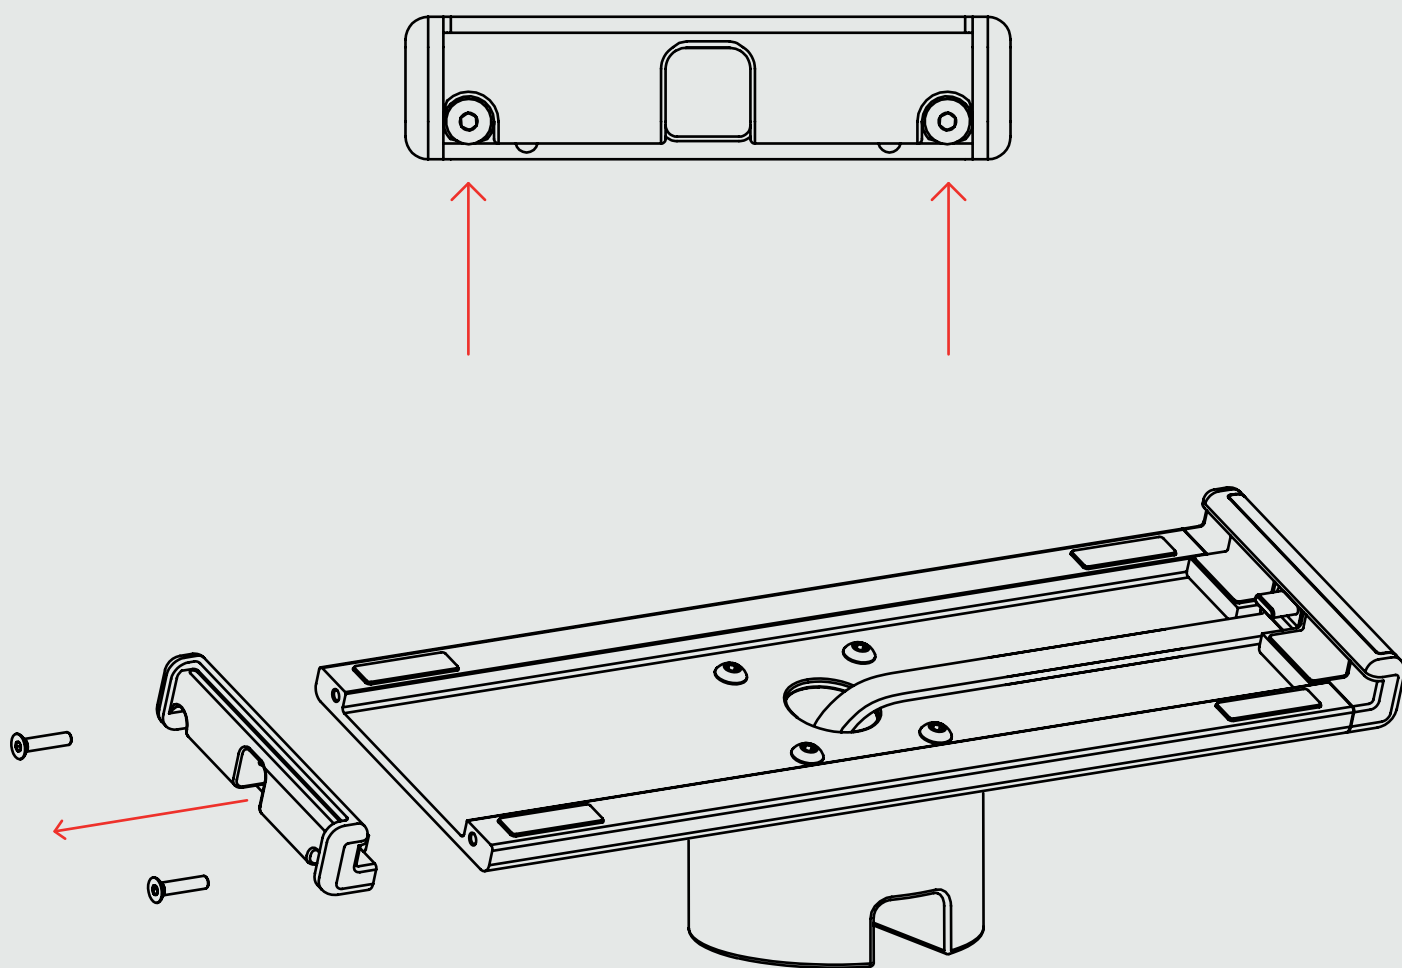

Step 11:

Place the iPad on the Lock Belt surface and slide it toward the USB-C port until the port engages. To confirm proper seating, connect the other end of the cable and perform a charging test.

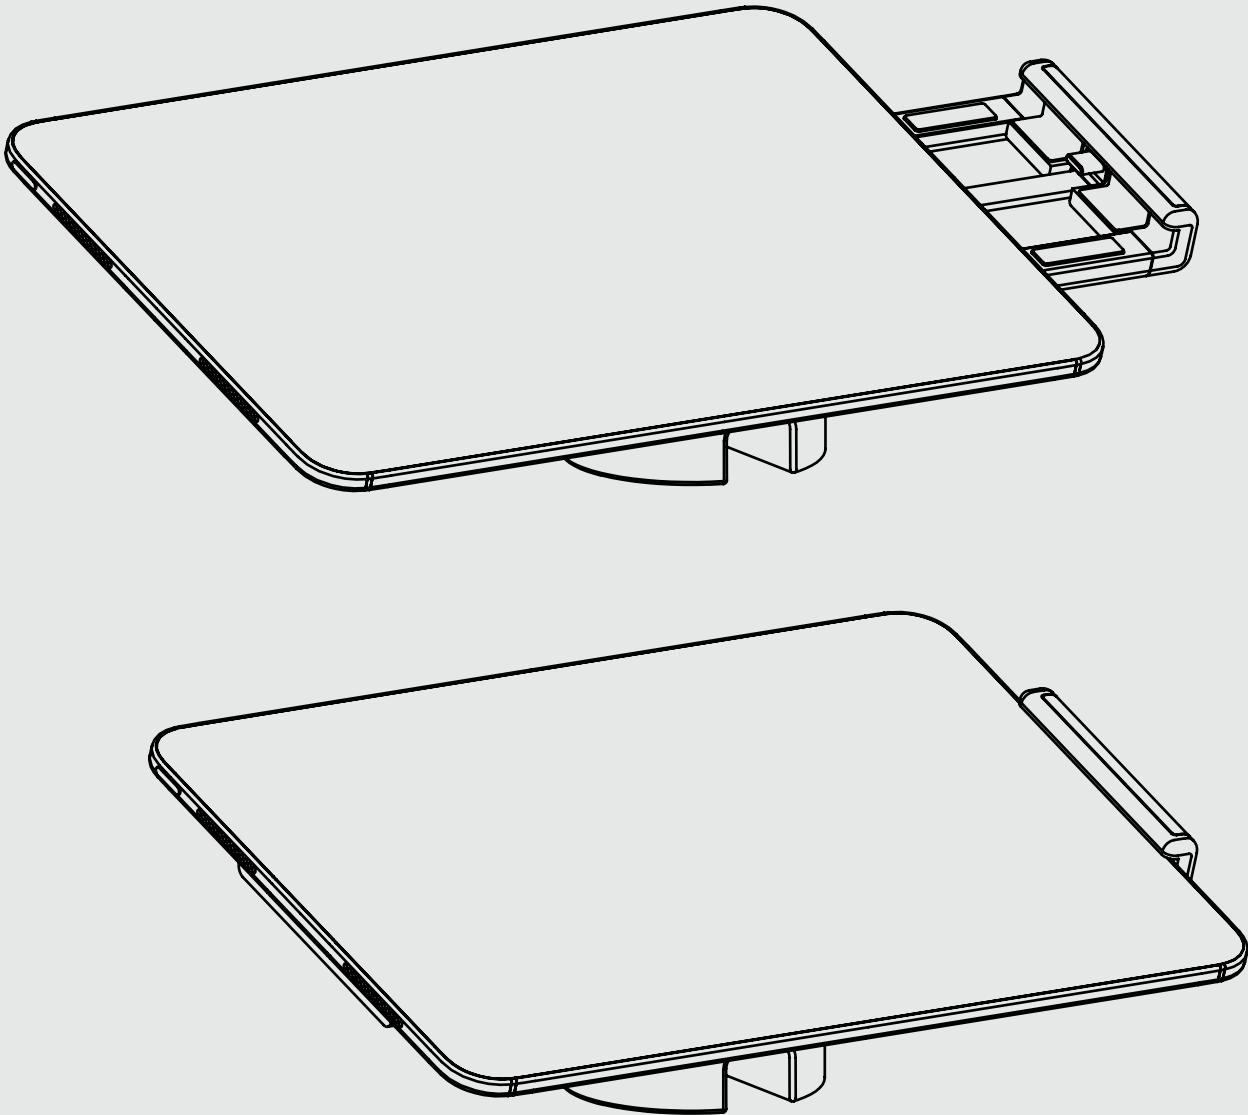

Step 12:

Once the iPad has been correctly seated, reattach the Powered Lock Belt end cap using the same fasteners, then reattach the end cap covers. Ensure the iPad is positioned straight and not at an angle during this step. After fastening, gently wiggle the iPad to confirm that it is securely locked in place.

